

# SVENSK STANDARD


## SS-ISO 11119-2:2012/Amd 1:2014

Fastställt/Approved: 2014-12-19  
Publicerad/Published: 2015-01-08  
Utgåva/Edition: 1  
Språk/Language: engelska/English  
ICS: 23.020.30

---

**Gasflaskor – Återfyllningsbara flaskor och storflaskor av kompositmaterial – Konstruktion, tillverkning och provning – Del 2: Hellindade fiberförstärkta flaskor och storflaskor av kompositmaterial med metallisk lastbärande innerbehållare, med kapacitet till och med 450 l (ISO 11119-2:2012/Amd 1:2014, IDT)**

**Gas cylinders – Refillable composite gas cylinders and tubes – Design, construction and testing – Part 2: Fully wrapped fibre reinforced composite gas cylinders and tubes up to 450 l with load-sharing metal liners (ISO 11119-2:2012/Amd 1:2014, IDT)**



Den internationella standarden ISO 11119-2:2012/Amd 1:2014 gäller som svensk standard. Detta dokument innehåller den officiella engelska versionen av ISO 11119-2:2012/Amd 1:2014.

The International Standard ISO 11119-2:2012/Amd 1:2014 has the status of a Swedish Standard. This document contains the official English version of ISO 11119-2:2012/Amd 1:2014.

© Copyright/Upphovsrätten till denna produkt tillhör SIS, Swedish Standards Institute, Stockholm, Sverige. Användningen regleras av slutanvändarlicensen för denna produkt.

© Copyright SIS, Swedish Standards Institute, Stockholm, Sweden. All rights reserved. The use of this product is governed by the end-user licence for this product.

*Upplysningar om sakinnehållet i standarden lämnas av SIS, Swedish Standards Institute, telefon 08-555 520 00. Standarder kan beställas hos SIS Förlag AB som även lämnar allmänna upplysningar om svensk och utländsk standard.*

*Information about the content of the standard is available from the Swedish Standards Institute (SIS), telephone +46 8 555 520 00. Standards may be ordered from SIS Förlag AB, who can also provide general information about Swedish and foreign standards.*

Standarden är framtagen av kommittén för Gasflaskor, SIS/TK 296.

Har du synpunkter på innehållet i den här standarden, vill du delta i ett kommande revideringsarbete eller vara med och ta fram andra standarder inom området? Gå in på [www.sis.se](http://www.sis.se) - där hittar du mer information.

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 58, *Gas cylinders*, Subcommittee SC 3, *Cylinder design*.



# Gas cylinders — Refillable composite gas cylinders and tubes — Design, construction and testing —

Part 2:

## Fully wrapped fibre reinforced composite gas cylinders and tubes up to 450 l with load-sharing metal liners

### AMENDMENT 1

This amendment will align the Drop Test of ISO 11119-2 with that of ISO 11119-3

#### 8.5.9 Drop test

##### 8.5.9.1 For cylinders up to and including 50 l water capacity

###### 8.5.9.1.1 Procedure

Two cylinders shall be filled with water to 50 % capacity and fitted with a plug, flush with the end of each cylinder.

Both cylinders shall be dropped twice, in each of the five positions shown in [Figure 2](#), from a minimum height of 1,2 m, on to a steel plate of a minimum of 5 mm thickness. The protective plate shall be sufficiently flat so that the difference in level between any two points on the surface is no more than 2 mm.

One cylinder shall be subjected to the burst test specified in 8.5.4.

The other cylinder shall be subjected to the pressure cycling test specified in 8.5.5.

The parameters that shall be monitored and recorded are the following:

- visual appearance after each drop — record position and dimensions of impact damage;
- parameters specified in test 8.5.4;
- parameters specified in test 8.5.5.

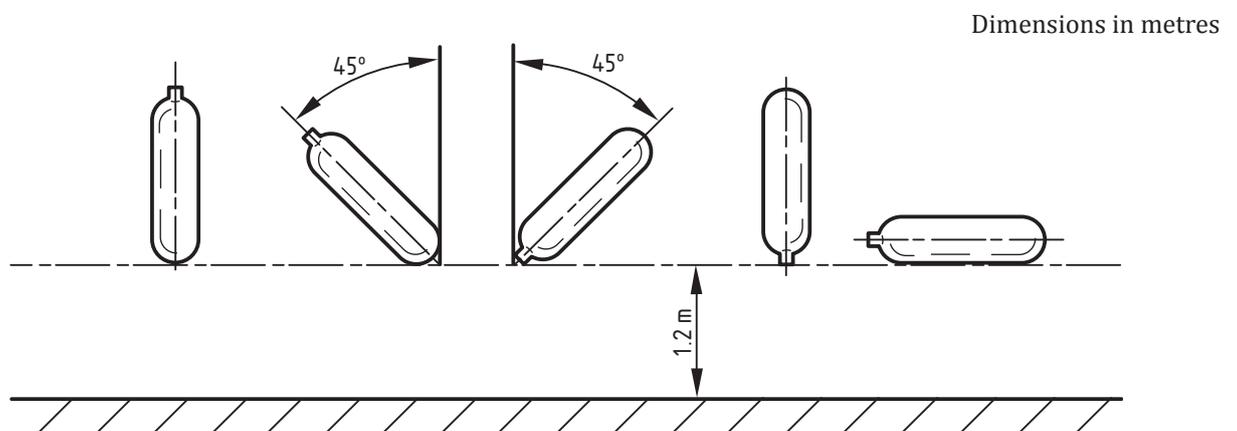


Figure 2 — Drop test

### 8.5.9.1.2 Criteria

First cylinder: burst pressure,  $p_b$ , shall be equal to or greater than 100 % of the minimum burst level required in the burst test (see 8.5.4).

Second cylinder: the cylinder shall satisfy the requirements of the ambient cycle test (see 8.5.5).

### 8.5.9.2 For cylinders over 50 l water capacity

#### 8.5.9.2.1 Procedure

- a) One or more empty cylinders, with sealing device to protect threads and sealing surfaces, shall be drop tested at ambient temperature. The surface onto which the cylinders are dropped shall be a smooth, horizontal concrete pad or flooring.
- b) One cylinder shall be dropped in a horizontal position with the lowest point of the cylinder no less than 1,8 m above the surface onto which it is dropped. One cylinder shall be dropped vertically on one end at a sufficient height above the floor or pad so that the potential energy is 1 220 J, but in no case shall the height of the lower end be greater than 1,8 m. One cylinder shall be dropped at a 45 ° angle onto a dome from a height such that the centre of gravity is at 1,8 m. However, if the lower end is closer to the ground than 0,6 m, the drop angle shall be changed to maintain a minimum height of 0,6 m and a centre of gravity of 1,8 m. The cylinder(s) shall be allowed to bounce on the concrete pad or flooring after the initial impact. No attempt shall be made to prevent this secondary impacting, but the cylinder can be prevented from toppling during the vertical drop test.

#### 8.5.9.2.2 Criteria

The cylinders shall withstand 3 000 pressurization cycles to 2/3 of the test pressure,  $p_h$ , without failure by burst or leakage. The test shall continue for a further 9 000 cycles, or until the cylinder fails by leakage, whichever is the sooner. In either case, the cylinder shall be deemed to have passed the test. However, if failure during this second part of the test is by burst, then the cylinder shall have failed the test.

### Table 1 - Type approval tests

In Table 1:

- replace  $_b$  with  $X^b$
- replace  $_c$  with  $X^c$
- replace  $_d$  with  $X^d$
- replace  $_e$  with  $X^e$