

Don för att förhindra förorening av dricksvatten genom återströmning – Ventil med backventilfunktion och luftintag som stängs vid flöde, placerad nedströms pådragsventil och avsedd för slanganslutning DN 15 till DN 32 – Familj H, typ A

Devices to prevent pollution by backflow of potable water – Hose union backflow preventer DN 15 to DN 32 – Family H, type A

Europastandarden EN 14454:2005 gäller som svensk standard. Detta dokument innehåller den officiella engelska versionen av EN 14454:2005.

The European Standard EN 14454:2005 has the status of a Swedish Standard. This document contains the official English version of EN 14454:2005.

Uppllysningar om **sakinnehållet** i standarden lämnas av SIS, Swedish Standards Institute, telefon 08 - 555 520 00.

Standarder kan beställas hos SIS Förlag AB som även lämnar **allmänna upplysningar** om svensk och utländsk standard.

Postadress: SIS Förlag AB, 118 80 STOCKHOLM
Telefon: 08 - 555 523 10. *Telefax:* 08 - 555 523 11
E-post: sis.sales@sis.se. *Internet:* www.sis.se

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 14454

May 2005

ICS 13.060.20; 23.060.01

English version

Devices to prevent pollution by backflow of potable water - Hose union backflow preventer DN 15 to DN 32 - Family H, type A

Dispositifs de protection contre la pollution de l'eau potable
par retour - Disconnecteur d'extrémité DN 15 à DN 32 -
Famille H, type A

Sicherungseinrichtungen zum Schutz des Trinkwassers
gegen Verschmutzung durch Rückfließen -
Sicherungsarmatur für Schlauchanschlüsse DN 15 bis DN
32 - Familie H, Typ A

This European Standard was approved by CEN on 24 December 2004.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

EN 14454:2005 (E)

Contents		Page
Foreword		3
Introduction		4
1	Scope	5
2	Normative references	5
3	Terms and definitions	6
4	Nominal sizes	6
5	Designation	6
6	Marking and technical documents	7
7	Symbolization	8
8	General design characteristics	9
9	Physico-chemical characteristics	10
10	Characteristics and tests	11
11	Acoustic characteristics	22
Annex A (normative) Sampling and test sequence		24

Foreword

This document (EN 14454:2005) has been prepared by Technical Committee CEN/TC 164 "Water supply", the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2005, and conflicting national standards shall be withdrawn at the latest by November 2005.

This document has been developed with reference to EN 1717 "Protection against pollution of potable water in water installations and general requirements of devices to prevent pollution by backflow".

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

EN 14454:2005 (E)

Introduction

In respect of potential adverse effects on the quality of water intended for human consumption, caused by the product covered by this document:

- a) this document provides no information as to whether the product may be used without restriction in any of the Member States of the EU or EFTA;
- b) it should be noted that, while awaiting the adoption of verifiable European criteria, existing national regulations concerning the use and/or the characteristics of this product remain in force.

1 Scope

This document specifies:

- a) field of application;
- b) requirements for hose union backflow preventer;
- c) dimensional and the physico-chemical properties and the properties of general hydraulic, mechanical and acoustic design of hose union backflow preventers DN 15 to DN 32;
- d) test method and requirements for verifying these properties;
- e) marking and presentation;
- f) acoustics.

This document specifies the characteristics of hose union backflow preventers DN 15 to DN 32 that are suitable for use in drinking water systems at pressures up to 1 MPa (10 bar) and temperatures up to 65 °C and for 1 h at 90 °C.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 806-1:2000, *Specifications for installations inside buildings conveying water for human consumption — Part 1: General*

EN 1717:2000, *Protection against pollution of potable water in water installations and general requirements of devices to prevent pollution by backflow*

EN ISO 228-1, *Pipe threads where pressure-tight joints are not made on the threads — Part 1: Dimensions, tolerances and designation (ISO 228-1:2000)*

EN ISO 3822-1, *Acoustics — Laboratory tests on noise emission from appliances and equipment used in water supply installations — Part 1: Method of measurement (ISO 3822-1:1999)*

EN ISO 3822-3, *Acoustics — Laboratory tests on noise emission from appliances and equipment used in water supply installations — Part 3: Mounting and operating conditions for in-line valves and appliances (ISO 3822-3:1997)*

EN ISO 3822-4, *Acoustics — Laboratory tests on noise emission from appliances and equipment used in water supply installations — Part 4: Mounting and operating conditions for special appliances (ISO 3822-4:1997)*

EN ISO 5167-1, *Measurement of fluid flow by means of pressure differential devices inserted in circular cross-section conduits running full - Part 1: General principles and requirements (ISO 5167-1:2003)*

EN ISO 6509, *Corrosion of metals and alloys — Determination of dezincification resistance of brass (ISO 6509:1981)*

ISO 7-1, *Pipe threads where pressure-tight joints are made on the threads — Part 1: Dimensions, tolerances and designation*

EN 14454:2005 (E)

ISO 9227, *Corrosion tests in artificial atmospheres — Salt spray tests*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 1717:2000, EN 806-1:2000 and the following apply.

hose union backflow preventer

two pressure zones separated by a check valve. The check valve is closed at zero flow and the air inlets are open. Normal operation flow of water: check valve open; air inlets closed.

For the purpose of this document "hose union backflow preventer(s) HA" is (are) hereafter referred to as "device(s)"

4 Nominal size

The nominal size of device (DN) shall correspond to the denomination of the thread according in Table 1.

For specifications of threads see 8.2.

Table 1 — Nominal size vs thread size

DN	15	20	25	32
Thread size	G ½	G ¾	G 1	G 1 ¼

5 Designation

The device is designated by:

- a) name;
- b) reference to this document (EN 14454);
- c) family, type;
- d) DN;
- e) body material;
- f) acoustic group.

EXAMPLE of designation

Hose union backflow preventer, EN 14454, family H, type A, DN 20, gun metal, I

6 Marking and technical documents

6.1 General

In countries where the use of products made of dezincification resistant materials is not required, the dezincification resistant products according to EN ISO 6509, as well as the products which do not contain zinc, may be marked "DR".

In countries where the use of dezincification resistant materials is required, the dezincification resistant products, as well as the products which do not contain zinc, shall be marked "DR".

6.2 Marking

The devices shall be marked permanently and visibly on the body or on a fixed data plate.

This information shall be on the outside of the device. The indications shall be indelible and obtained by moulding, engraving or similar procedures.

The marking shall indicate:

- a) name, manufacturer's brand or logo;
- b) arrow indicating normal direction of flow;
- c) nominal size (DN);
- d) acoustic group;
- e) letters indicating family and type of device;

Marking a), b), c), and e) are obligatory. In case there is no marking for d), the device shall be considered as not classified acoustically.

6.3 Technical documents

Each package and/or each batch and/or each catalogue of the supplier/manufacturer shall contain technical product information which shall be written in a commonly spoken language of the country in which the product is sold.

It shall provide the following information:

- a) designation and purpose of the product;
- b) installation instructions;
- c) minimum installation height;
- d) (brand) name and address of supplier / manufacturer;
- e) instructions for maintenance, if any;
- f) spare part list, if any.

EN 14454:2005 (E)

7 Symbolization

The graphic representation of the device is as follows (see Figure 1):

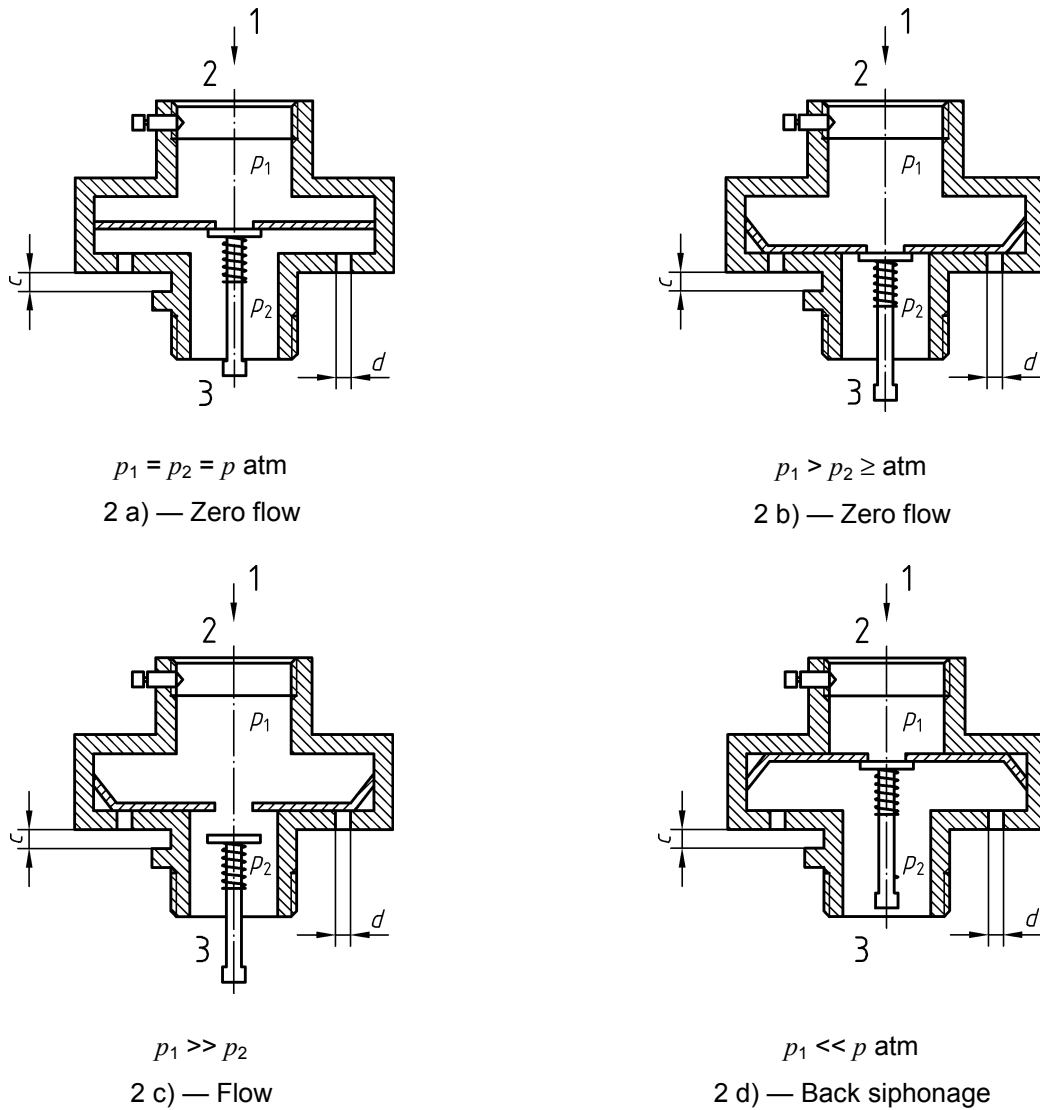


Figure 1 — Graphic symbol

8 General design characteristics

8.1 Design principle

A typical design principle of HA device is given in Figure 2.



Key

1 Direction of water flow

2 Inlet 3 Outlet

Figure 2 — Design principle of HA device

8.2 Connections

Connections shall comply with EN ISO 228-1 or ISO 7-1.

The device has a female thread at the inlet and a male thread at the outlet.