



SIS - Standardiseringskommissionen i Sverige

Standarden utarbetad av

**SEK, SVENSKA ELEKTRISKA KOMMISSIONEN**

SVENSKA ELEKTROTEKNISKA NORMER, SEN  
**SVENSK STANDARD SS-ISO 7574/4**

Första giltighetsdag	Utgåva	Sida	Ingår i
1986-11-15	1	1 (15)	SEK Översikt ISO 43
			Registrering
			<b>Reg 459 75 74/4</b>

SIS FASTSTÄLLER OCH UTGER SVENSK STANDARD SAMT SÄLJER NATIONELLA OCH INTERNATIONELLA STANDARDPUBLIKATIONER ©

**Akustik –  
Statistiska metoder för beräkning och verifiering av  
värden för bullerdeklaration av maskiner och apparater –  
Del 4: Metod för verifiering av partier av maskiner**

*Acoustics –*

*Statistical methods for determining and verifying stated noise emission values of  
machinery and equipment –*

*Part 4: Methods for stated values for batches of machines*

Denna standard återger den engelska texten i nedanstående ISO-publikation, utarbetad av International Organization for Standardization, ISO:

**ISO 7574/4, First edition, 1985**

**Acoustics – Statistical methods for determining and verifying stated  
noise emission values of machinery and equipment –  
Part 4: Methods for stated values for batches of machines**

## 0 Introduction

A general introduction to the four-part series of ISO 7574 is given in ISO 7574/1.

For the purposes of this part of ISO 7574, the term “labelled value” stands for all kinds of stated value (e.g. information on a label, the upper noise limit set by an authority, the agreed contract value) for which the methods may be applied.

This part of ISO 7574 contains statistical sampling methods for checking the stated noise emission values for batches (lots) of machines. The labelled value for all machines in a batch is checked by sampling procedures. A reference standard deviation is required when testing the compliance of a batch of a specific family of machines. In addition, information on the type of sampling to be used (single, double or sequential) and the sample size is required. The procedures specified in this part of ISO 7574 assume that the noise emission values of a batch (lot) of machines will follow a normal distribution. The statistical parameters upon which this part of ISO 7574 is based assume that there is a 95 % probability of acceptance if no more than 6,5 % of the noise emission values in a batch exceed the labelled value. Information is included to assist the labeller in determining a labelled value based on these statistical parameters.

The methods given in this part of ISO 7574 ensure that a batch (lot) of machines labelled in accordance with the specifications for the verification procedure have a predetermined probability of acceptance.

## 1 Scope and field of application

This part of ISO 7574 provides guidelines for determining the labelled value,  $L_C$ , by the labeller and specifies statistical sampling procedures for verifying compliance of the noise emissions of a batch (lot) of machinery and equipment with its labelled value.

This part of ISO 7574 is intended to assist those parties responsible for drawing up specific labelling codes for specific families

of machines. It is also intended to be of use to labellers who want their batches of machines to conform with verification procedures that are in accordance with the specifications given in the specific labelling codes based on clause 7.

This part of ISO 7574 does not deal with the consequences that ensue if the stated value is not confirmed as verified for a batch (lot) of machines.

## 2 References

ISO 3951, *Sampling procedures and charts for inspection by variables for percent defective.*

ISO 4871, *Acoustics – Noise labelling of machinery and equipment.*

ISO 7574/1, *Acoustics – Statistical methods for determining and verifying stated noise emission values of machinery and equipment – Part 1: General considerations and definitions.*

## 3 Definitions

For the purposes of this part of ISO 7574, the definitions given in ISO 7574/1 apply.

## 4 General

For a batch of machines, the noise emission values will cover a certain range due to the variability between the machines (relevant measure: standard deviation of production,  $\sigma_p$ ) and due to measurement errors occurring under reproducibility conditions (relevant measure: standard deviation of reproducibility,  $\sigma_R$  – see 3.17 in ISO 7574/1). The measure for the overall variability is the total standard deviation,  $\sigma_t$ .

The aim of labelling a batch of machines is to indicate as labelled value,  $L_C$ , a limit below which a specified large propor-

tion of the noise emission values of the batch shall lie.  $L_c$  is expressed as an integer in decibels.

When used for checking the compliance of a batch of machines with the labelled value, this part ISO 7574 works on the principle that only a sample from the batch is measured. This principle is appropriate for mass-produced machines. This part of ISO 7574 considers the need to control machines which are too noisy compared with the labelled value; therefore, it applies to one-sided cases for checking an upper limit, not to two-sided cases which would also exclude machines which are too quiet. The principle is based on balancing risks which are expressed by a pair of values: a specified proportion,  $p_{1-\alpha}$ , of noise emission values of the batch exceeding the labelled value and a specified probability of rejection,  $\alpha$ , for a lot with this proportion  $p_{1-\alpha}$ .

Verifying compliance of the lot with the labelled value is based on the following assumptions:

- that the noise emission values of the batch approximate to a normal distribution, characterized by the mean value  $\mu$  and the specified reference standard deviation  $\sigma_M$ ; and
- that the rejection probability for a batch is equal to a specified value  $\alpha$  if the labelled value  $L_c$  is chosen so that the proportion of noise emission values of the batch exceeding  $L_c$  is equal to the specified value  $p_{1-\alpha}$ .

Procedures in this part of ISO 7574 are based on  $\alpha = 5\%$  and  $p_{1-\alpha} = 6,5\%$ .

NOTE — The fixed value of 6,5 % was chosen in order

- to comply with the definition for  $L_c$ ;
- to make sure that the difference between  $L_c$  and the mean for the batch is reasonably limited; and
- to achieve a common understanding, comparability and compatibility of different  $L_c$  values for different machines from different families of machines.

If the batch and the labelled value,  $L_c$ , conform with these values, the sampling inspection procedures are set in such a way that the batch will be accepted with the probability of  $1 - \alpha = 95\%$  and the mean value will be expected to lie approximately  $1,5 \sigma_M$  below the labelled value.

#### NOTES

1 If it is explicitly known that a stated value is not an upper value as  $L_c$  but represents a mean value (which is not in accordance with ISO 4871), the checking procedure might also be used by adding  $1,5 \sigma_M$  to this mean value to obtain  $L_c$ .

2 Methods for estimating risk factors are given in annexes A and B; they may be replaced by repeated, simulated application of the checking procedure using actual measurement data, if the assumption that the noise emission values of the batch approximate to a normal distribution is uncertain. Normality tests will be described in a future International Standard.

3 The sampling inspection by variables for isolated batches of machines, as described in this part of ISO 7574, broadly conforms to ISO 3951 which is, however, designed for the inspection of batches from continuous production. ISO 3951 does not provide for double and sequential sampling inspection, and the operating characteristic curves do not intersect exactly at the producer's risk point; this is, however, the aim of this part of ISO 7574 with the view to establishing the meaning of  $L_c$  unambiguously.

It should be noted that fixing  $\alpha$  and  $p_{1-\alpha}$  results in all operating characteristic curves (OCs) intersecting at the producer's risk point.

If the actual total standard deviation is different from the reference standard deviation  $\sigma_M$ , guidance for the labeller is given in clause 5 and annex B.

NOTE — In the application of this part of ISO 7574, it is assumed that all measurements will be performed by a testing laboratory which has appropriate test facilities and trained staff.

## 5 Guidelines for the determination of the labelled value, $L_c$ , by the labeller

As the determination of the labelled value for a batch of machines is the sole responsibility of the labeller, this clause is given for guidance only to provide a predictable probability of acceptance.

$L_c$  can only be determined in accordance with this part of ISO 7574 if a specific labelling code in conformity with clause 7 exists [see, in particular, 7 c) to f)].

A reasonably large number of measured values of individual machines,  $L_i^*$ , are determined in accordance with the specific measurement test code for the specific family of machines. (The asterisk in the symbols is used here to differentiate between measurements in conformity with this clause and those in conformity with clause 6.)

The mean value,  $\bar{L}^*$ , and the total standard deviation,  $s_t^*$  are calculated from the measured values,  $L_i^*$ , of the individual machines in a sample (see also clause B.2).

$\bar{L}^*$  and  $s_t^*$  are estimates of the mean value  $\mu$  and the total standard deviation,  $\sigma_t$ , of the batch to be labelled.

In accordance with clause B.3, equation (16), the following equations will provide guidance for the labeller who wants to have a probability of acceptance,  $P_a$ , defined by himself:

$$L_c = \mu + \left( k + \frac{u_{P_a}}{\sqrt{n}} \right) \sigma_M \quad \text{for } \sigma_t = \sigma_M \quad \dots (1)$$

$$L_c = \mu + k\sigma_M + \frac{u_{P_a}}{\sqrt{n}} \sigma_t \quad \text{for } \sigma_t \neq \sigma_M \quad \dots (2)$$

where

$\mu$  is the mean value of the batch;

$n$  is the specified verification sample size for single sampling inspection (6.2) or the equivalent single sample size in the case of double sampling inspection (see 6.3) or sequential sampling inspection (see 6.4);

$k$  is a function of  $n$ , in accordance with table 1;

$u_{P_a}$  is the quantile of the normal distribution for the value  $P_a$  (see table 7);

$\sigma_M$  is the specified reference standard deviation for verification;

$\sigma_t$  is the actual total standard deviation.

If the labeller accepts a risk of rejection of 5 % (i.e. he wants to have a probability of acceptance,  $P_a$ , of 95 %), the above equations result in the following <sup>1)</sup> :

$$L_c = \mu + 1,5 \sigma_M \quad \text{for } \sigma_t = \sigma_M \quad \dots (3)$$

$$L_c = \mu + 1,5 \sigma_t + k(\sigma_M - \sigma_t) \quad \text{for } \sigma_t \neq \sigma_M \quad \dots (4)$$

For examples, see clause B.3.

NOTE — Testing may be necessary from time to time in order to ensure that the labelled value continues to be correct. Testing is also required whenever physical changes are made to the production machines that may affect their noise emissions.

## 6 Verifying the labelled value for a batch of machines

### 6.1 General

Three equivalent procedures for verifying the labelled value of the batch are described in this part of ISO 7574: single sampling, double sampling and sequential sampling. The results obtained from any one of the three procedures will generally be the same if the assumption that the emission values are distributed approximately as a normal distribution is valid.

One and only one of the three procedures shall be chosen and specified in the labelling code for each specific family of machines (see clause 7). All three procedures require a specified reference standard deviation,  $\sigma_M$ , for each specific family of machines.

The sample size,  $n$ , in the case of single sampling (or equivalent sample sizes  $n_1$  and  $n_2$  in the case of double sampling or equivalent maximum sample size  $n_{max}$  in the case of sequential sampling) shall also be specified for each specific family of machines (see annex A). In general, double or sequential sampling results in a somewhat smaller number of machines being tested.

NOTE — The reason for applying only one of the three procedures for a specific family of machines is that the procedures are only equivalent provided that the assumption of normality is absolutely valid.

The procedures outlined in 6.2 to 6.4 are applicable for reproducibility conditions (see 3.17 in ISO 7574/1), and for

repeatability conditions (see 3.16 in ISO 7574/1). It shall be ascertained that no outstanding systematic error of measurement results is connected with relevant laboratories.

For each of the procedures outlined in 6.2 to 6.4, the measured values,  $L_i$ , shall be determined in accordance with the specific measurement test code for the specific family of machines [see clause 7 c) and d)]. The measured values shall not be rounded prior to statistical calculations.

### 6.2 Single sampling inspection

In accordance with 6.1 and clause 7,  $n$  and  $\sigma_M$  have been specified for the relevant family of machines.

Take at random a sample of size  $n$  from the batch under consideration.

The measured values are  $L_i$  ( $i = 1, \dots, n$ ) and their mean value is

$$\bar{L} = \frac{1}{n} \sum_{i=1}^n L_i \quad \dots (5)$$

Determine the value

$$A = L_c - k \sigma_M \quad \dots (6)$$

using the acceptability constant  $k$  calculated from the formula

$$k = u_{1 - p_1 - \alpha} - \frac{u_{1 - \alpha}}{\sqrt{n}} \quad \dots (7)$$

where

$$u_{1 - p_1 - \alpha} = 1,514$$

$$u_{1 - \alpha} = 1,645$$

are the quantiles of the standardized normal distribution for the values  $1 - p_1 - \alpha = 93,5 \%$  and  $1 - \alpha = 95 \%$  respectively.

Table 1 gives the values for  $k$  for different sample sizes  $n$ .

**Table 1 – Acceptability constant  $k$  for different sample sizes  $n$**

$n$	1	2	3	4	5	6	7	8	9	10
$k$	-0,131	0,351	0,564	0,692	0,778	0,842	0,892	0,932	0,966	0,994

1) Use equation (1) or (2), by replacing  $\frac{u_{P_a}}{\sqrt{n}}$  with  $\frac{u_{1-\alpha}}{\sqrt{n}} = u_{1-p_1-\alpha} - k$  [see equation (7)]

where  $u_{1-p_1-\alpha} \approx 1,5$ .

Make the decision on the acceptability of the labelled value using the following rules:

if  $\bar{L} < A$ , the labelled value is confirmed as verified for the batch;

if  $\bar{L} > A$ , the labelled value is not confirmed as verified for the batch.

NOTE – See example in A.4.1.

### 6.3 Double sampling inspection

In accordance with 6.1 and clause 7,  $n_1$ ,  $n_2$  and  $\sigma_M$  have been specified for the relevant family of machines.

Take at random a sample of specified size  $n_1$  from the batch under consideration.

The measured values are  $L_i (i = 1, \dots, n_1)$  and their mean value is  $\bar{L}$ .

Determine the values

$$A = L_c - k_a \sigma_M \quad \dots (8)$$

$$B = L_c - k_r \sigma_M \quad \dots (9)$$

using the acceptability constants  $k_a$  and  $k_r$  given in table 2.

**Table 2 – Acceptability constants  $k_a$ ,  $k_r$  and  $k_d$  for double sampling and equivalent sample sizes (single/double)**

Double sampling					Equivalent single sampling
$n_1$	$n_2$	$k_a$	$k_r$	$k_d$	$n$
1	1	0,863	-0,210	0,191	2
1	2	1,194	-0,201	0,533	3
1	3	2,834	0,235	0,632	4
2	3	1,649	-0,130	0,774	5
2	4	1,553	-0,228	0,848	6
3	4	1,750	0,057	0,892	7
3	5	1,504	0,302	0,938	8
3	6	2,083	0,018	0,962	9

NOTE – The only double sampling plans given are those whose operating characteristic curves are nearest to the operating characteristic curves for the equivalent single sampling plans.

Make the decision on the acceptability of the labelled value using the following rules:

if  $\bar{L} < A$ , the labelled value is confirmed as verified for the batch;

if  $\bar{L} > B$ , the labelled value is not confirmed as verified for the batch;

if  $A < \bar{L} < B$ , take a second sample of specified size  $n_2$ . The measurement values of both samples are  $L_i (i = 1, \dots, n_1 + n_2)$  and their total mean is  $\bar{L}_t$ .

Determine the value

$$C = L_c - k_d \sigma_M \quad \dots (10)$$

using  $k_d$  from table 2.

If  $\bar{L}_t < C$ , the labelled value is confirmed as verified for the batch.

If  $\bar{L}_t > C$ , the labelled value is not confirmed as verified for the batch.

NOTE – See example in A.4.2.

### 6.4 Sequential sampling inspection

In accordance with 6.1 and clause 7,  $n_{max}$  and  $\sigma_m$  have been specified for the relevant family of machines.

Start with the first item taken from the batch under consideration.

After each test, calculate the following summation from the  $n^*$  results  $L_i$  that have been obtained:

$$S_{n^*} = \sum_{i=1}^{n^*} (L_i - b) \quad \dots (11)$$

where  $b$  is taken from the appropriate column in table 3.

**Table 3 – Acceptability values  $a$ ,  $b$  and  $r$  for sequential sampling and equivalent sample sizes (single/sequential)**

Sequential sampling				Equivalent single sampling
$n_{max}$	$a$	$b$	$r$	$n$
3	-1,267 $\sigma_M$	$L_c - 0,351 \sigma_M$	1,267 $\sigma_M$	2
5	-1,552 $\sigma_M$	$L_c - 0,564 \sigma_M$	1,552 $\sigma_M$	3
6	-1,791 $\sigma_M$	$L_c - 0,692 \sigma_M$	1,791 $\sigma_M$	4
8	-2,000 $\sigma_M$	$L_c - 0,778 \sigma_M$	2,000 $\sigma_M$	5
9	-2,188 $\sigma_M$	$L_c - 0,842 \sigma_M$	2,188 $\sigma_M$	6
11	-2,362 $\sigma_M$	$L_c - 0,892 \sigma_M$	2,362 $\sigma_M$	7
12	-2,524 $\sigma_M$	$L_c - 0,932 \sigma_M$	2,524 $\sigma_M$	8
14	-2,680 $\sigma_M$	$L_c - 0,966 \sigma_M$	2,680 $\sigma_M$	9
15	-2,823 $\sigma_M$	$L_c - 0,994 \sigma_M$	2,823 $\sigma_M$	10

NOTE – The only sequential plans given are those whose operating characteristic curves are nearest to the operating characteristic curves for the equivalent single sampling plans.

Make the decision (using  $a$  and  $r$  from table 3) on the acceptability of the labelled value using the following rules:

if  $S_{n^*} \leq a$ , the labelled value is confirmed as verified for the batch;

if  $S_{n^*} > r$ , the labelled value is not confirmed as verified for the batch;

if  $a < S_{n^*} < r$ , take the next item at random from the batch and apply the rules again.

Stop the sampling if  $n^*$  equals the specified maximum sample size  $n_{\max}$  by applying the following decisions<sup>1)</sup>:

if  $S_{n_{\max}} < 0$ , the labelled value is confirmed as verified for the batch;

if  $S_{n_{\max}} > 0$ , the labelled value is not confirmed as verified for the batch.

NOTE – See example in A.4.3.

## 7 Information to be given in a specific labelling code for a specific family of machines

In order to draw up a document (specific labelling code) for verifying compliance of batches of a specific family of machines, consideration shall be given to the following:

- economic aspects of the verification;
- relative magnitude of the consumer's risk ( $\beta$ ,  $p_\beta$ ,  $\Delta L$ , see clause A.3);
- measurement data variability.

The result of these considerations shall be given in the specific labelling code for the specific family of machines in accordance with the list which appears below. These labelling specifications should preferably be included as an annex to the specific measurement test code for the specific family of machines.

The labelling specification shall include the following information:

- a) a statement that the specific labelling code is based on this part of ISO 7574;
- b) a definition of the family of machines to which this test code applies;
- c) identification of the specific measurement test code for the specific family of machines;
- d) the mounting, loading and operating conditions to be used during noise measurements, if the measurement test code specifies several options;
- e) the sampling procedure to be used (single, double or sequential) and relevant sample size ( $n$  or  $n_1$  and  $n_2$  or  $n_{\max}$ ) to be used when verifying conformity of a batch of a specific family;
- f) the reference standard deviation,  $\sigma_M$ , to be used when verifying conformity of a batch of a specific family;
- g) a reference to the relevant operating characteristic curve (OC) in accordance with annex A which is determined by the information provided in e) above.

If a specific labelling code for the specific family of machines does not (yet) exist, yet the methods of this part of ISO 7574 are intended to be applied, the specifications listed above should be agreed upon (e.g. by contract). Thus  $\sigma_M$  might be agreed upon on the basis of the information on the actual total standard deviation,  $\sigma_t$ , for the relevant batches of machines, as provided by the manufacturer of these machines.

1) The truncation of the procedure which is made for practical reasons alters the operating characteristic curve in an undefined way. The truncation error is ignored in this part of ISO 7574.

## Annex A

### Operating characteristic curves and examples of single, double and sequential sampling

(This annex forms an integral part of the standard.)

#### A.1 General

This annex provides information on the meaning of operating characteristic curves and gives guidelines for the use of the operating characteristic curves for selecting the appropriate sample size when specifying a sampling plan in a specific labelling code for a specific family of machines.

the probability that a batch has been wrongly rejected is therefore 5 % [producer's risk point on the operating characteristic curve (OC)]. As, in addition to the fixed producer's risk point ( $p_{1-\alpha}, 1-\alpha$ ), the sample size  $n$  is specified in a specific labelling code for each specific family of machines, the relevant OC curve is therefore fixed. An OC curve shows the probability of acceptance  $P_a$  of the batch as a function of the proportion  $p$  of the noise emission values of the batch exceeding the labelled value. The OC curves for different specified sample sizes,  $n$ , are given in figure 1.

#### A.2 Operating characteristic curves (OCs)

The values for  $k$  given in table 1 are based on a producer's risk of  $\alpha = 5\%$ . When the proportion of noise emission values of the batch exceeding the labelled value equals  $p_{1-\alpha} = 6,5\%$ ,

NOTE – The curves in figure 1 are derived from

$$u_{P_a} = (u_{1-p} - k) \sqrt{n}$$

which is the general form of equation (7) given in 6.2.

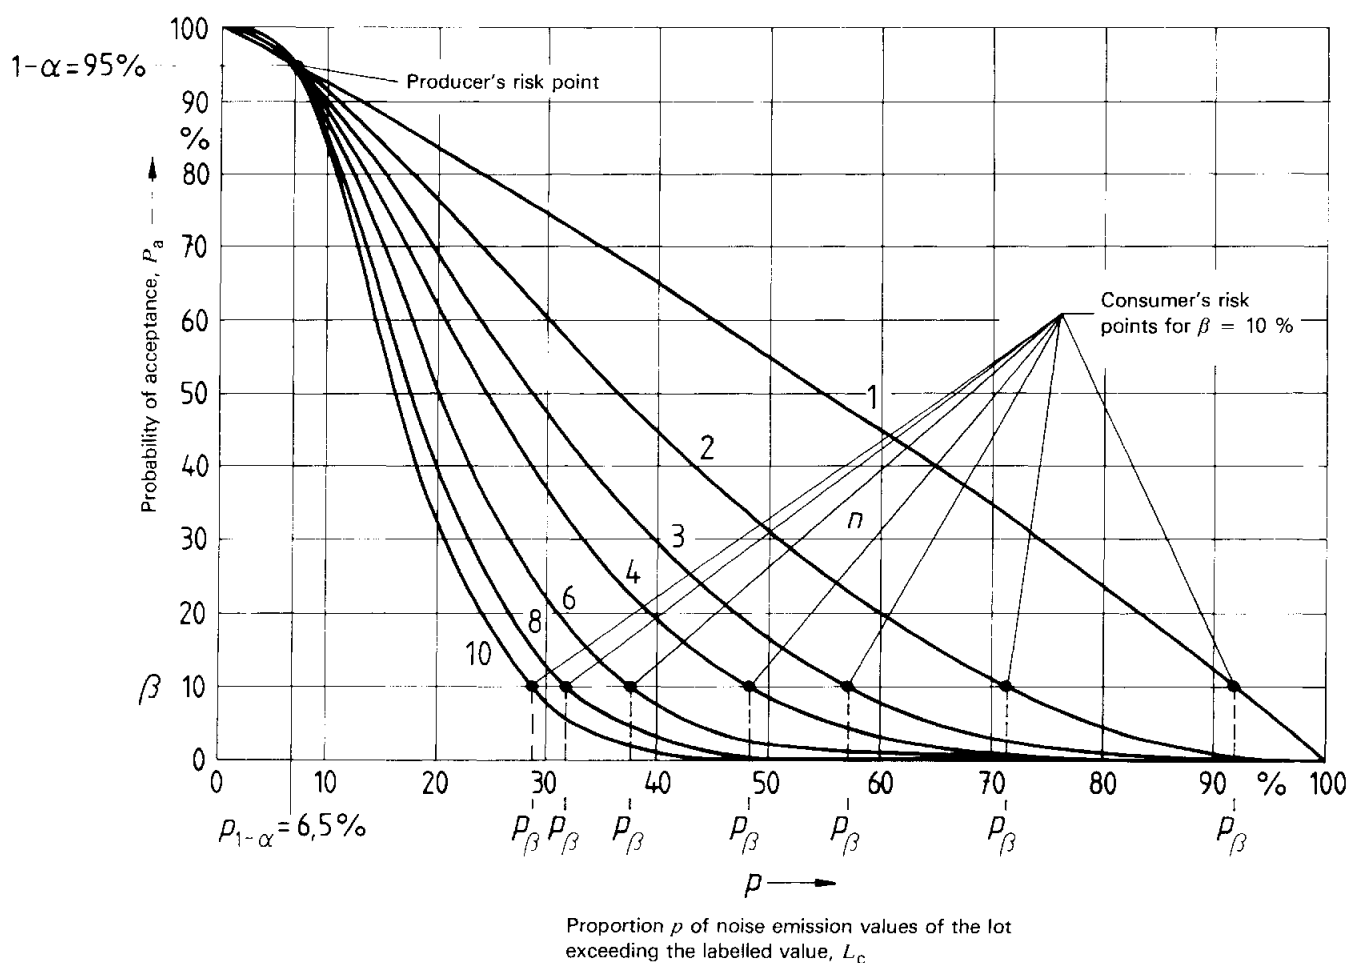


Figure 1 – Operating characteristic curves (OCs) for single (double and sequential) sampling

On the basis of the operating characteristic curves (derived for single sampling inspection), the equivalent double sampling and sequential sampling plans, in accordance with 6.3 and 6.4, were constructed. These OC curves are substantially similar to the OC curves for the single sampling.

### A.3 Guidelines for the selection of an appropriate sample size

In conformity with clauses 6 and 7, the sample size  $n$  (together with  $\sigma_M$ ) shall be specified for each specific family of machines in a specific labelling code by those drawing up the labelling code. When deciding how to select  $n$ , it may help to calculate an assumed labelled value  $L_c' = L_c - \Delta L$  with such a high proportion  $p_\beta$  of noise emission values exceeding  $L_c'$  that acceptance would only be possible with a very low probability of only 10 % ( $\beta = 10\%$  consumer's risk) instead of 95 % connected with the value  $L_c$  (producer's risk  $\alpha = 5\%$ ). The lower  $\Delta L$  is, the larger is the sample size  $n$  and the smaller is the proportion  $p_\beta$  of noise emission values exceeding  $L_c'$  at the consumer's risk point (for the value of  $u$ , see table 7).

$$\begin{aligned} \Delta L &= L_c - L_c' = (u_{1-\alpha} - u_\beta) \frac{\sigma_M}{\sqrt{n}} \quad \dots(12) \\ &= (1,645 + 1,282) \frac{\sigma_M}{\sqrt{n}} \approx 2,93 \frac{\sigma_M}{\sqrt{n}} \end{aligned}$$

For a given  $\Delta L$ , the sample size  $n$  is established after a rounding up to the next integer

$$n = \left( \frac{2,93 \sigma_M}{\Delta L} \right)^2 \quad \dots (13)$$

Figure 2 gives this relation in graph form.

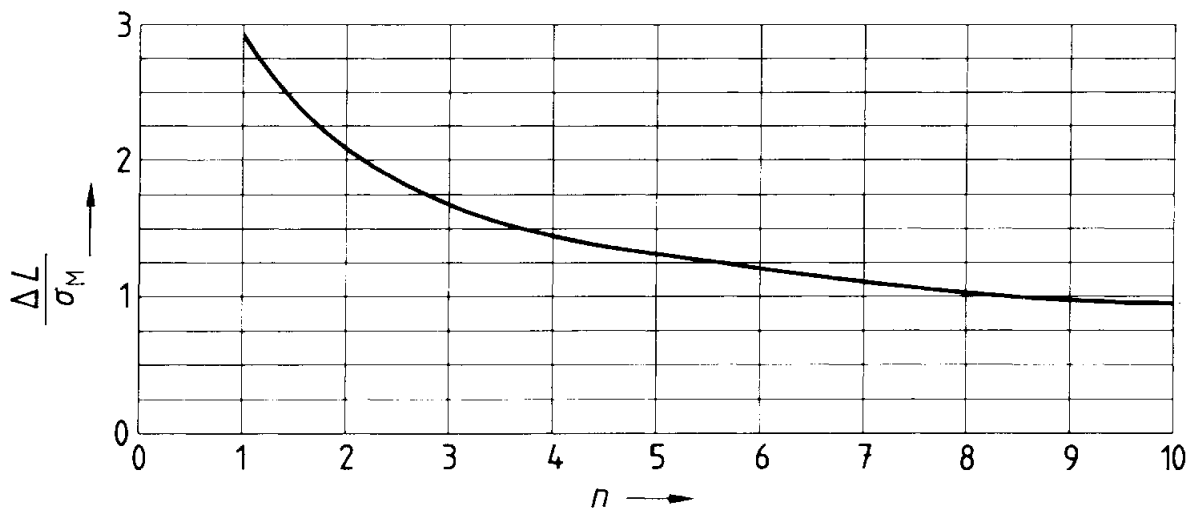


Figure 2 – Relation between  $\frac{\Delta L}{\sigma_M}$  and sample size  $n$

The operating characteristic curve is now fixed by  $n$  (see figure 1).

#### Example

Given

$$\sigma_M = 2 \text{ dB}$$

$$\Delta L = 3 \text{ dB}$$

Then

$$n = \left( \frac{2,93 \times 2}{3} \right)^2 = 3,83 \approx 4$$

### A.4 Examples of single, double and sequential sampling inspection

#### A.4.1 Example of single sampling inspection (see 6.2)

The following specifications are laid down for batches of a specific family of machines:

$$\sigma_M = 2 \text{ dB}$$

$$n = 3$$

Labelled value is  $L_c = 87 \text{ dB}$

From table 1:

$$k = 0,564$$

$$A = L_c - k \sigma_M = 87 - (0,564 \times 2) = 85,9 \text{ dB}$$