



SIS - Standardiseringskommissionen i Sverige

Standarden utarbetad av

SMS, SVERIGES MEKANSTANDARDISERING

SVENSK STANDARD SS-ISO 7804

Första giltighetsdag

Utgåva

Sida

Registrering

1988-04-01

1

1 (5)

SMS reg 464.8222

SIS FASTSTÄLLER OCH UTGER SVENSK STANDARD SAMT SÄLJER NATIONELLA OCH INTERNATIONELLA STANDARDPUBLIKATIONER ©

Vägfordon – Sidoöppning för kraftuttag på lastfordon

Denna standard utgörs av den engelska versionen av den internationella standarden ISO 7804-1985.

Commercial road vehicles – Side openings for truck power take-offs

This Swedish standard consists of the English version of the International Standard ISO 7804-1985.

UDK 629.11.013:629.114.4

Beteckningen SS för svensk standard infördes 1978. Svensk standard med beteckning SEN, SIS eller SMS får beteckningen SS vid revidering.

Commercial road vehicles — Side openings for truck power take-offs

1 Scope and field of application

This International Standard lays down the dimensions of side openings for truck power take-offs. These specifications are applicable for all general installations of power take-offs on the transmission gear box of trucks and tractors where the size of the transmission permits.

2 Definition

gear depth : Distance from transmission face to pitch line of power take-off drive gear.

3 Specifications

3.1 Types

This International Standard defines two types of side opening :

- Type R : regular duty type, 6 bolts M10
- Type H : heavy duty type, 8 bolts M12

Both types are specified with two alternative gear depths and subdivided accordingly.

3.2 Type R

Type R shall have one of the following gear depths :

- Type R1 : 20 ± 10 mm
- Type R2 : 70 ± 10 mm

Type R1 shall comply with the requirements of figure 1.

Type R2 shall comply with the additional requirements of figure 2.

3.3 Type H

Type H shall have one of the following gear depths :

- Type H1 : 14 ± 10 mm
- Type H2 : 64 ± 10 mm


Types H1 and H2 shall comply with the requirements of figure 3.

4 Designation

Example for the designation of a 6 bolt M10 side opening (type R) with gear depth 20 ± 10 mm (code 1) :

PTO opening ISO 7804-R1

Dimensions in millimetres

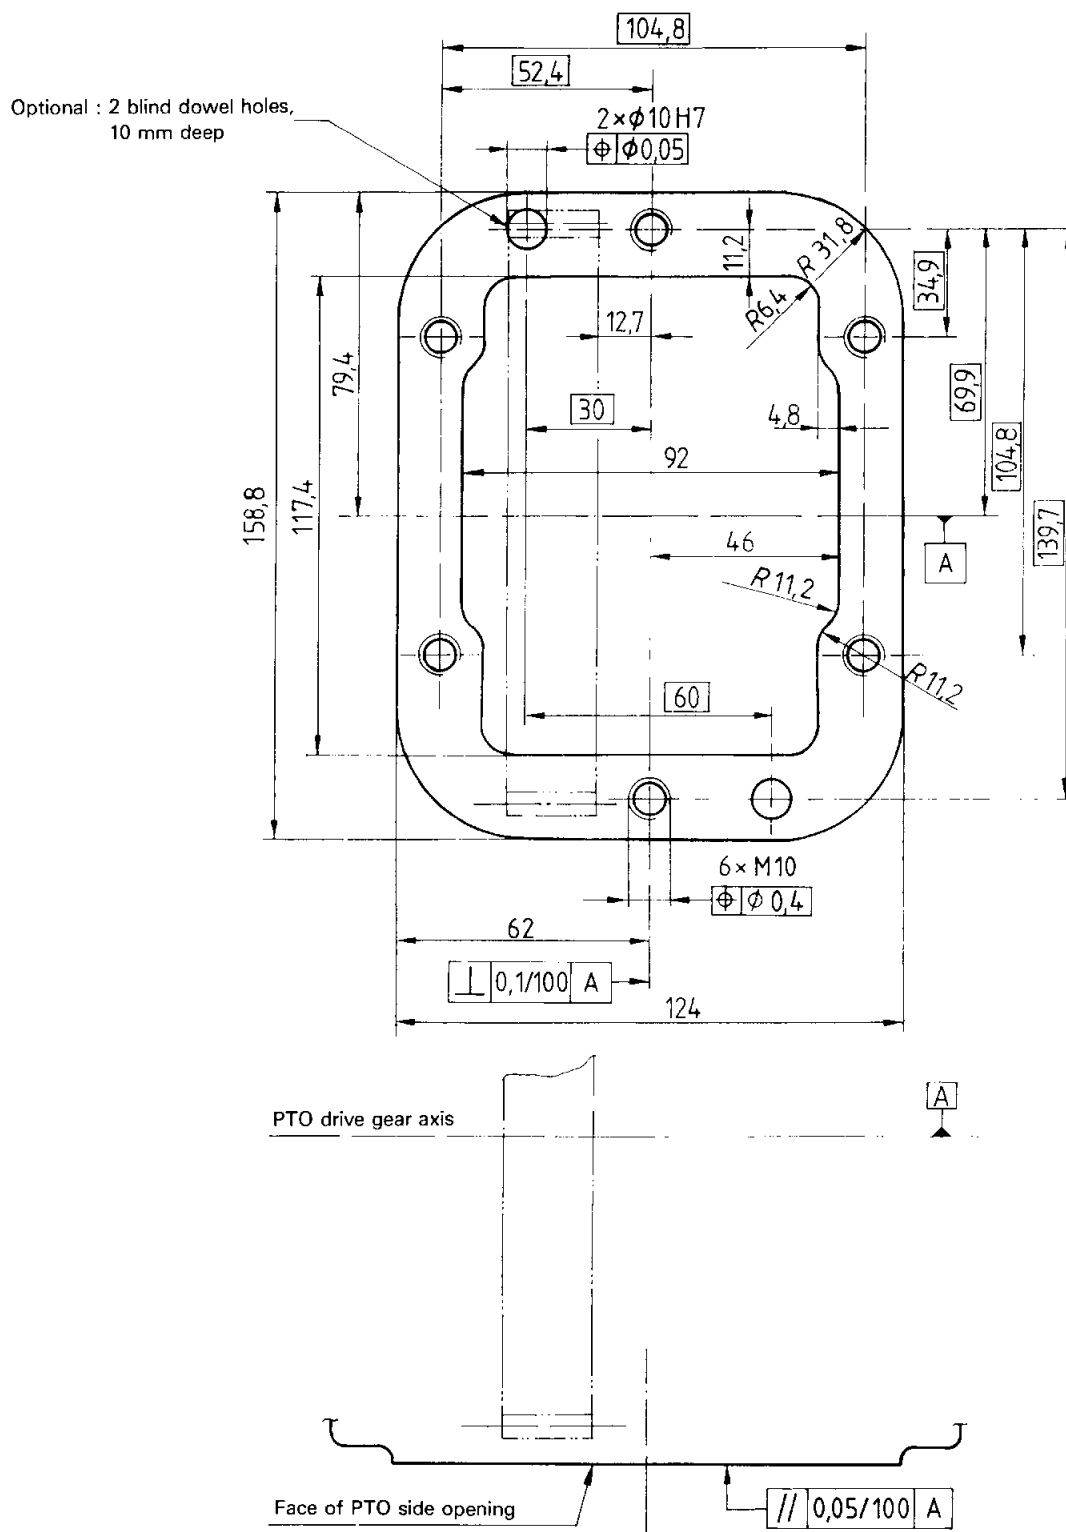

NOTES

- 1 Gear data and backlash are specified by gearbox manufacturer.
- 2 PTO drive gear may be located either side of the vertical centre-line

Figure 1 – Type R regular duty type 6 bolts M10 – Type R1