

**Ergonomi för termiskt klimat – Metoder för  
bedömning av reaktioner hos människan vid  
kontakt med ytor –**

Del 1: Varma ytor (ISO 13732-1:2006)

**Ergonomics of the thermal environment –  
Methods for the assessment of human responses  
to contact with surfaces –**

Part 1: Hot surfaces (ISO 13732-1:2006)

Europastandarden EN ISO 13732-1:2006 gäller som svensk standard. Detta dokument innehåller den officiella engelska versionen av EN ISO 13732-1:2006.

Denna standard ersätter SS-EN 563, utgåva 1, SS-EN 563/A1, utgåva 1, SS-EN 563/A1/AC:2000 och SS-EN 13202, utgåva 1.

The European Standard EN ISO 13732-1:2006 has the status of a Swedish Standard. This document contains the official English version of EN ISO 13732-1:2006.

This standard supersedes the Swedish Standard SS-EN 563, edition 1, SS-EN 563/A1, edition 1, SS-EN 563/A1/AC:2000 and SS-EN 13202, edition 1.

---

Upplysningar om **sakinnehållet** i standarden lämnas av SIS, Swedish Standards Institute, telefon 08 - 555 520 00.

Standarder kan beställas hos SIS Förlag AB som även lämnar **allmänna upplysningar** om svensk och utländsk standard.

*Postadress:* SIS Förlag AB, 118 80 STOCKHOLM  
*Telefon:* 08 - 555 523 10. *Telefax:* 08 - 555 523 11  
*E-post:* sis.sales@sis.se. *Internet:* www.sis.se

EUROPEAN STANDARD  
NORME EUROPÉENNE  
EUROPÄISCHE NORM

**EN ISO 13732-1**

September 2006

ICS 13.180

Supersedes EN 13202:2000, EN 563:1994

English Version

**Ergonomics of the thermal environment - Methods for the  
assessment of human responses to contact with surfaces - Part  
1: Hot surfaces (ISO 13732-1:2006)**

Ergonomie des ambiances thermiques - Méthodes  
d'évaluation de la réponse humaine au contact avec des  
surfaces - Partie 1: Surfaces chaudes (ISO 13732-1:2006)

Ergonomie der thermischen Umgebung -  
Bewertungsverfahren für menschliche Reaktionen bei  
Kontakt mit Oberflächen - Teil 1: Heiße Oberflächen (ISO  
13732-1:2006)

This European Standard was approved by CEN on 19 August 2006.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

**Management Centre: rue de Stassart, 36 B-1050 Brussels**

# Contents

Page

Foreword.....	iv
Introduction .....	v
1 Scope .....	1
2 Normative references .....	2
3 Terms and definitions.....	2
4 Burn thresholds .....	3
4.1 General.....	3
4.2 Burn threshold data.....	4
5 Assessment of risk of burning .....	10
5.1 Procedure .....	10
5.2 Identification of hot, touchable surfaces.....	10
5.3 Task analysis.....	11
5.4 Measurements of surface temperatures.....	11
5.5 Choice of applicable burn threshold value .....	12
5.6 Comparison of surface temperature and burn threshold.....	13
5.7 Determination of risk of burning .....	14
5.8 Repetition .....	14
6 Protective measures .....	15
6.1 General.....	15
6.2 No risk of burning .....	15
6.3 Risk of burning.....	15
7 Guidance for setting surface temperature limit values .....	16
7.1 Procedure .....	16
7.2 Assessment of risk of burning .....	16
7.3 Decision upon protective measures .....	16
7.4 Selection of appropriate values .....	16
7.5 Setting of surface temperature limit value.....	17
Annex A (informative) Scientific background .....	18
Annex B (normative) Contact periods.....	20
Annex C (informative) Flow charts for application of this part of ISO 13732.....	21
Annex D (informative) Thermal properties of selected materials.....	23
Annex E (informative) Examples of protective measures against burns .....	24
Annex F (informative) Example for assessment of risk of burning .....	26
Annex G (informative) Examples for setting surface temperature limit values .....	31
Annex H (informative) Safety signs for hot surfaces.....	35
Bibliography .....	37

## Foreword

This document (EN ISO 13732-1:2006) has been prepared by Technical Committee CEN/TC 122 "Ergonomics", the secretariat of which is held by DIN, in collaboration with Technical Committee ISO/TC 159 "Ergonomics".

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2007, and conflicting national standards shall be withdrawn at the latest by March 2007.

This document supersedes EN 13202:2000 and EN 563:1994.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this document.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

## Introduction

When human skin comes into contact with a hot solid surface, burns may occur. Whether or not they do depends on a number of factors, the most important of which are

- the temperature of the surface,
- the material of the surface,
- the period of contact between the skin and the surface,
- the structure of the surface, and
- the sensitivity of the human being who comes into contact with the surface (e.g. child or adult).

Other factors can also play a part but are of minor importance. In Annex A the scientific background is presented and in the Bibliography publications concerning the objective are listed.

This part of ISO 13732 contains a collection of temperature threshold values for burns when the skin is in contact with a hot solid surface (Clause 4). It also contains a method for the assessment of the risk of burning, i.e. the application of the provided ergonomics data within a risk assessment procedure (Clause 5). A further application of the data may be the specification of temperature limit values for hot surfaces. Such temperature limit values may be specified in product standards or in regulations in order to prevent human beings sustaining a burn when in contact with the surface of a hot product. Guidance on how to select reasonable temperature limit values for that purpose is given in Clause 7. For different products with the same risk of burning it is reasonable to establish identical surface temperature limit values. Therefore, this part of ISO 13732 provides the possibility of harmonizing such temperature limit values for all kind of products.

Touching a hot surface may take place intentionally, e.g. to operate an electrically or gas powered machine or tool, or unintentionally, when a person is near a hot object. The period of contact with the hot surface will be different if the object is touched intentionally than if it is touched unintentionally. Considering human reaction times and their distribution in the population, 0,5 s is the minimum applicable contact period for unintentional touching of a hot surface for healthy adults on an acceptable safety level. For intentional touching the minimum applicable contact period will be longer. For the application of this part of ISO 13732, it is essential to select a contact period which best represents the real circumstances when a hot product is touched. Guidance for such selection is given in Annex B.

The ergonomics data provided in this part of ISO 13732 are mainly based on scientific research and represent, as far as is known, the behaviour of the human skin when in contact with a hot surface. Some of the data (e.g. burn threshold data for very short contacts of 0,5 s) are not directly based on scientific research but are deduced by extrapolation of the known threshold curves or by reasonable conclusion using scientific results.

The temperature threshold values provided in this part of ISO 13732 are valid for burning the skin when in contact with hot surfaces. For the time being there are not sufficient scientific data available on the effects of discomfort and pain to for them to be included in this part of ISO 13732. Some data for pain can be derived from national standards (see Annexes A and the Bibliography). Research projects are planned for obtaining data for discomfort and pain. When the results of these projects are available, this part of ISO 13732 may be revised in order to also include discomfort and pain temperature threshold values. ISO 13732-2 deals also with discomfort.

This part of ISO 13732 does not provide burn data on the skin that comes into contact with liquids or gases.

NOTE With the exception of water there are no such data available up to now. For water and liquids with similar heat capacity and heat flow properties burn threshold values for bare metals can be chosen.

# Ergonomics of the thermal environment — Methods for the assessment of human responses to contact with surfaces —

## Part 1: Hot surfaces

### 1 Scope

This part of ISO 13732 provides temperature threshold values for burns that occur when human skin is in contact with a hot solid surface.

It also describes methods for the assessment of the risks of burning, when humans could or might touch hot surfaces with their unprotected skin.

This part of ISO 13732 also gives guidance for cases where it is necessary to specify temperature limit values for hot surfaces; it does not set surface temperature limit values.

NOTE 1 Such temperature limit values can be specified in specific product standards or in regulations in order to prevent human beings sustaining burns when in contact with the hot surface of a product.

This part of ISO 13732 deals with contact periods of 0,5 s and longer.

It is applicable to contact when the surface temperature is essentially maintained during the contact (see 4.1).

It is not applicable if a large area of the skin (approximately 10 % or more of the skin of the whole body) can be in contact with the hot surface. Neither does it apply to skin contact of more than 10 % of the head or contact which could result in burns of vital areas of the face.

NOTE 2 In some cases, the results of contact with a hot surface can be more serious for the individual, for example:

- burns resulting in the restriction of airways;
- large burns (more than 10 % of the body surface) that can impair the circulation by fluid loss;
- heating of a large proportion of the head or whole body that could lead to unacceptable heat strain even in the absence of burning.

This part of ISO 13732 is applicable to the hot surfaces of all kind of objects: equipment, products, buildings, natural objects, etc. For the purposes of simplification, it mentions only products; nevertheless, it applies to all other objects as well.

It is applicable to products used in any environment, e.g. in the workplace, in the home.

It is applicable to hot surfaces of products that may be touched by healthy adults, children, elderly people and also by people with physical disabilities.

It does not provide data for the protection against discomfort or pain.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments).

ISO 7726:1998, *Ergonomics of the thermal environment — Instruments for measuring physical quantities*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

### 3.1 touchable surface

surface of a product that can be touched by a person's skin

### 3.2 surface temperature

$T_s$   
temperature of a material's surface

NOTE Surface temperature is expressed in degrees Celsius (°C).

### 3.3 contact period

$D$   
duration of contact of the skin with the surface

NOTE Contact period is expressed in seconds (s).

### 3.4 thermal inertia

product of density ( $\rho$ ), thermal conductivity ( $K$ ) and specific thermal capacity ( $c$ ) of a material

### 3.5 burn threshold

surface temperature defining the boundary between no burn and a superficial partial thickness burn, caused by contact of the skin with this surface for a specified contact period

NOTE Burns are classified into three levels, depending on severity.

— superficial partial thickness burn:

in all but the most superficial burns, the epidermis is completely destroyed but the hair follicles and sebaceous glands as well as the sweat glands are spared.

— deep partial thickness burn:

a substantial part of the dermis and all sebaceous glands are destroyed and only the deeper parts of the hair follicles or the sweat glands survive.

— whole thickness burn:

the full thickness of the skin is destroyed and there are no surviving epithelial elements.




## 4 Burn thresholds

### 4.1 General

This clause provides surface temperature data for burn thresholds.

NOTE The occurrence of burning depends on the temperature of the skin and on the period of raised skin temperature. The connection between skin temperature, the period of its influence and occurrence of burning has been scientifically studied and is known (see Annex A). But it is not practicable by simple means to measure the temperature of the skin during its contact with the hot surface of a product. Therefore, in this part of ISO 13732 it is not the temperature values of the skin which are specified but the temperature values of hot surfaces of products which, when in contact with the skin, lead to burns (the burn thresholds). The temperature of a surface of a product is simply measurable by appropriate measuring facilities.

The surface temperatures which lead to burns during contact of the skin with a hot product depend on the material of which the product consists, and on the period of the contact of the skin with the surface. This relationship is presented in Figure 1, which shows this relationship for several groups of materials which have similar heat conductivity properties and therefore similar burn thresholds.

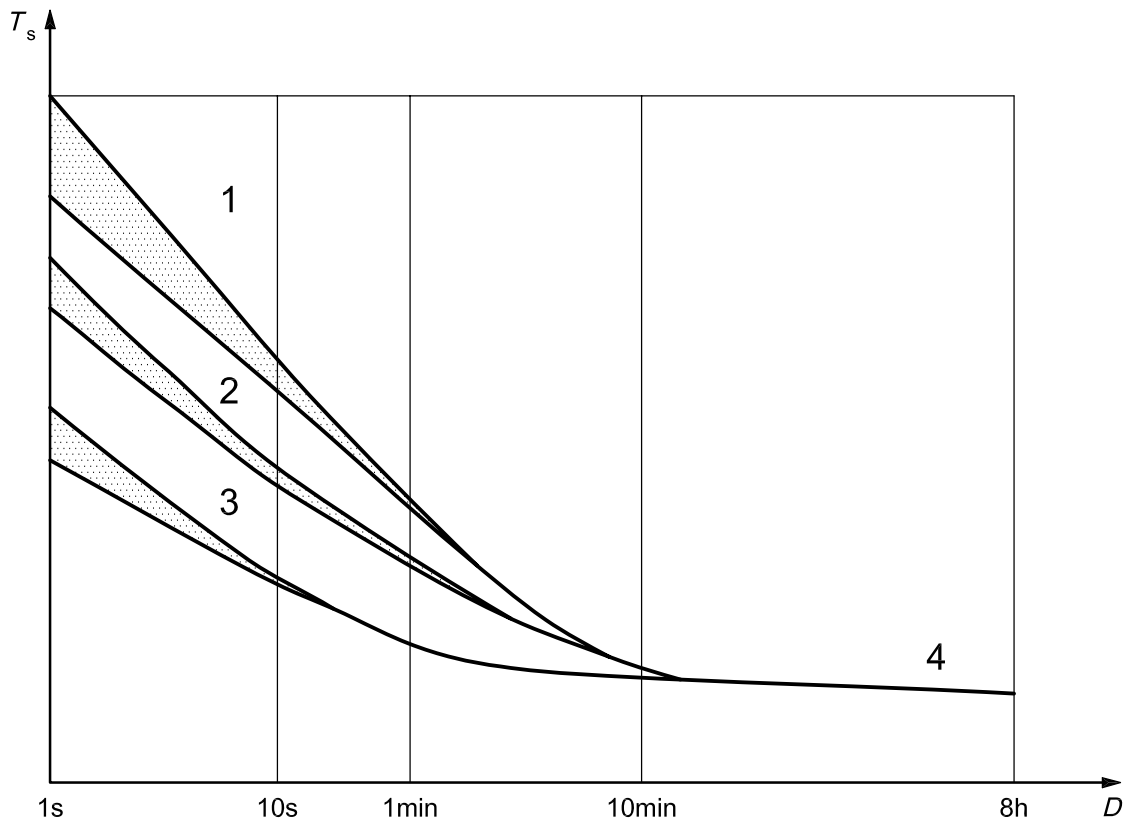

#### Key

- $D$  contact period
- $T_s$  surface temperature
- 1 plastics
- 2 ceramics
- 3 metals
- 4 burn threshold

**Figure 1 — Illustration of general relationship between burn threshold and contact period when hot surface is touched by skin**

**EN ISO 13732-1:2006 (E)**

A point on a burn threshold curve indicates, for a particular contact period, that surface temperature which lies between non-injury of the skin and the onset of a superficial partial thickness burn when the skin comes into contact with the hot surface. Surface temperature values lying below the curve in general do not lead to a burn. Surface temperature values lying above the curve will lead to a burn of the skin (see also Annex A).

The illustrative Figure 1 only serves to provide a better understanding and does not accurately represent the burn threshold data. The exact burn threshold values are to be taken from Figures 2, 5, 6 and 7 and Table 1.

For short contact periods the burn thresholds are not drawn as lines in the illustrative Figure 1 and the detailed Figures 2, 5, 6 and 7, but as spreads. This takes into account the fact that for short contact periods the knowledge of the temperature boundary between non-burning and the onset of burning is not complete. The burn threshold depends on several factors, including thickness of the skin at the touching point, moisture of the skin's surface (sweating), contamination of the skin (e.g. grease), touching force differences between the heat conductivity properties of materials which have been combined in one group, uncertainties of the scientific determination of the burn threshold values (see also Annex A). However, these influences are considered to be minor compared to the influence of the heat conductivity properties of the different material groups.

For longer contact periods the uncertainties are less than for short contact periods. So for long contact periods exact values for burn thresholds are specified. The differences in the values for different groups of materials also disappear for long contact periods.

The data given presumes that the surface temperature is essentially maintained during the contact period either by the mass of the product or by a heating source. These conditions will describe exposures which are in conformity with the worst case.

## **4.2 Burn threshold data**


### **4.2.1 Burn thresholds for contact periods between 0,5 s and 10 s**

#### **4.2.1.1 General**

In the case of short contact (contact periods of 0,5 s to 10 s), the burn threshold spreads are not set in numbers but are reflected in graphs in relation to the contact period. The burn thresholds of materials with similar heat conductivity properties are combined to represent one spread.

#### **4.2.1.2 Uncoated metals**

The burn thresholds presented in Figure 2 are valid for the smooth surfaces of uncoated metals. In the case of rough metal surfaces, however, the values may lie above those for smooth surfaces, but not more than 2 °C beyond the upper limit of the indicated burn threshold spread.

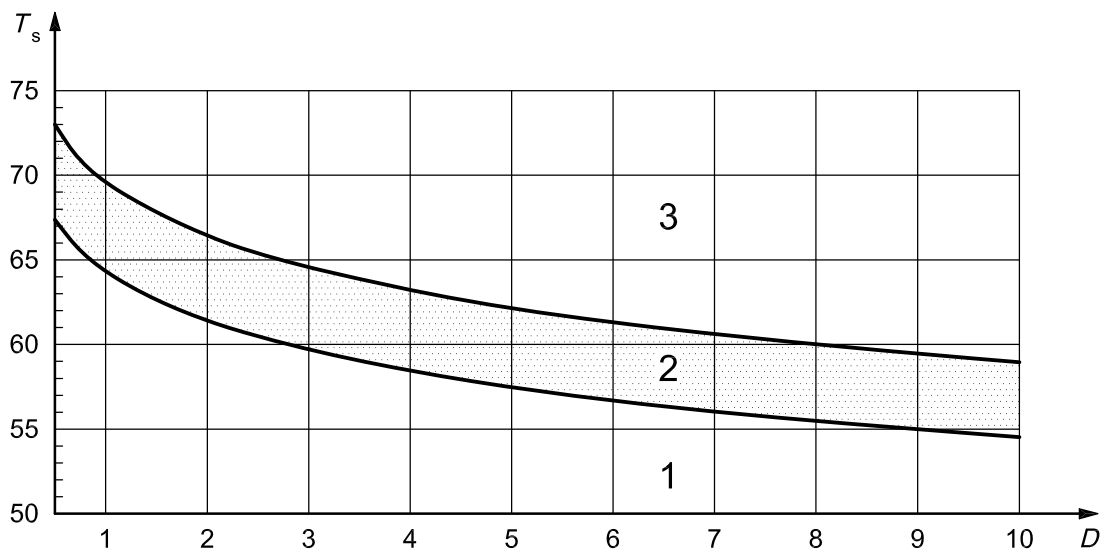

**Key**

- $D$  contact period, s
- $T_s$  surface temperature, °C
- 1 no burn
- 2 burn threshold
- 3 burn

**Figure 2 — Burn threshold spread when the skin in contact with hot, smooth surface made of bare (uncoated) metal**

**4.2.1.3 Coated metals**

The values for the effect of coating a metal are shown in Figures 3 and 4. The values reflect the rise of the burn threshold above the burn threshold for uncoated metal. In order to obtain a burn threshold for coated metal, the value for the rise of the burn threshold in Figure 3 or 4 and the burn threshold for the uncoated metal in Figure 2 have to be added.