

SVENSK STANDARD

SS-EN ISO 19132:2008

Fastställt/Approved: 2008-09-08

Publicerad/Published:

Utgåva/Edition: 1

Språk/Language: engelska/English

ICS: 35.020; 35.240.01; 35.240.30; 35.240.50; 35.240.60; 35.240.70

**Geografisk information – Lägesbaserade tjänster –
referensmodell (ISO 19132:2007)**

**Geographic information – Location-based services –
Reference model (ISO 19132:2007)**

This preview is downloaded from www.sis.se. Buy the entire standard via <https://www.sis.se/std-67172>

Hitta rätt produkt och ett leveranssätt som passar dig

Standarder

Genom att följa gällande standard både effektiviserar och säkrar du ditt arbete. Många standarder ingår dessutom ofta i paket.

Tjänster

Abonnemang är tjänsten där vi uppdaterar dig med aktuella standarder när förändringar sker på dem du valt att abonnera på. På så sätt är du säker på att du alltid arbetar efter rätt utgåva.

e-nav är vår online-tjänst som ger dig och dina kollegor tillgång till standarder ni valt att abonnera på dygnet runt. Med e-nav kan samma standard användas av flera personer samtidigt.

Leveranssätt

Du väljer hur du vill ha dina standarder levererade. Vi kan erbjuda dig dem på papper och som pdf.

Andra produkter

Vi har böcker som underlättar arbetet att följa en standard. Med våra böcker får du ökad förståelse för hur standarder ska följas och vilka fördelar den ger dig i ditt arbete. Vi tar fram många egna publikationer och fungerar även som återförsäljare. Det gör att du hos oss kan hitta över 500 unika titlar. Vi har även tekniska rapporter, specifikationer och "workshop agreement".

Matriser är en översikt på standarder och handböcker som bör läsas tillsammans. De finns på sis.se och ger dig en bra bild över hur olika produkter hör ihop.

Standardiseringsprojekt

Du kan påverka innehållet i framtida standarder genom att delta i någon av SIS ca 400 Tekniska Kommittéer.

Find the right product and the type of delivery that suits you

Standards

By complying with current standards, you can make your work more efficient and ensure reliability. Also, several of the standards are often supplied in packages.

Services

Subscription is the service that keeps you up to date with current standards when changes occur in the ones you have chosen to subscribe to. This ensures that you are always working with the right edition.

e-nav is our online service that gives you and your colleagues access to the standards you subscribe to 24 hours a day. With e-nav, the same standards can be used by several people at once.

Type of delivery

You choose how you want your standards delivered. We can supply them both on paper and as PDF files.

Other products

We have books that facilitate standards compliance. They make it easier to understand how compliance works and how this benefits you in your operation. We produce many publications of our own, and also act as retailers. This means that we have more than 500 unique titles for you to choose from. We also have technical reports, specifications and workshop agreements.

Matrices, listed at sis.se, provide an overview of which publications belong together.

Standardisation project

You can influence the content of future standards by taking part in one or other of SIS's 400 or so Technical Committees.

Europastandarden EN ISO 19132:2008 gäller som svensk standard. Detta dokument innehåller den officiella engelska versionen av EN ISO 19132:2008.

The European Standard EN ISO 19132:2008 has the status of a Swedish Standard. This document contains the official English version of EN ISO 19132:2008.

© Copyright/Upphovsrätten till denna produkt tillhör SIS, Swedish Standards Institute, Stockholm, Sverige. Användningen av denna produkt regleras av slutanvändarlicensen som återfinns i denna produkt, se standardens sista sidor.

© Copyright SIS, Swedish Standards Institute, Stockholm, Sweden. All rights reserved. The use of this product is governed by the end-user licence for this product. You will find the licence in the end of this document.

Upplysningar om sakinnehållet i standarden lämnas av SIS, Swedish Standards Institute, telefon 08-555 520 00.

Standarder kan beställas hos SIS Förlag AB som även lämnar allmänna upplysningar om svensk och utländsk standard.

Information about the content of the standard is available from the Swedish Standards Institute (SIS), tel +46 8 555 520 00.

Standards may be ordered from SIS Förlag AB, who can also provide general information about Swedish and foreign standards.

SIS Förlag AB, SE 118 80 Stockholm, Sweden. Tel: +46 8 555 523 10. Fax: +46 8 555 523 11.

E-mail: sis.sales@sis.se Internet: www.sis.se

EUROPEAN STANDARD

EN ISO 19132

NORME EUROPÉENNE

EUROPÄISCHE NORM

August 2008

ICS 35.240.70

English Version

Geographic information - Location-based services - Reference model (ISO 19132:2007)

Information géographique - Services basés sur la localisation - Modèle de référence (ISO 19132:2007)

Geoinformation - Standortbezogene Dienste - Referenzmodell (ISO 19132:2007)

This European Standard was approved by CEN on 15 August 2008.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

Page

Foreword.....	vii
Introduction	viii
1 Scope	1
2 Conformance.....	2
3 Normative references	2
4 Terms and definitions.....	2
5 Symbols and abbreviated terms	11
5.1 Acronyms	11
5.2 UML Notation.....	13
5.3 Taxonomy of data and services — Mapping to RDF.....	13
6 ODP Viewpoints used.....	15
6.1 Enterprise specification	15
6.2 Information specification	15
6.3 Computational specification.....	15
7 Participation Model.....	15
7.1 Model overview – Package: ISO 19132 (this International Standard).....	15
7.2 Package – LBS Participants	17
7.2.1 Scenarios and semantics.....	17
7.2.2 Type – LBS_Participant.....	19
7.2.3 Type – LBS_User	20
7.2.4 Type – LBS_ApplicationProvider	23
7.2.5 Type – LBS_DataProvider	24
7.2.6 Type – LBS_FeatureDataProvider	24
7.2.7 Type – LBS_ContentProvider	24
7.2.8 Type – LBS_SpatialContentProvider	24
7.2.9 Type – LBS_ServiceProvider	24
7.2.10 Type – LBS_ServiceBroker	25
7.2.11 Type – LBS_MobileDevice	25
7.2.12 Type – LBS_DataBroker – Class semantics	26
8 Service model.....	26
8.1 Package – LBS_Services	26
8.1.1 Package structure.....	26
8.1.2 Service taxonomy	27
8.2 Package – Basic Services	27
8.2.1 Package structure.....	27
8.2.2 Type – LBS_Tracking	28
8.2.3 Type – LBS_Routing.....	29
8.2.4 Type – LBS_Navigation	30
8.3 Package – Geomatics services	31
8.3.1 Package structure.....	31
8.3.2 Type – LBS_Location Transformation.....	32
8.3.3 Type – LBS_AddressParsing.....	34
8.3.4 Type – LBS_Geoparsing	34
8.3.5 Type – LBS_Gazetteer	35
8.3.6 Type – LBS_MapService	36
8.4 Package – Information Services.....	37
8.4.1 Package structure.....	37
8.4.2 Type – LBS_DataService.....	37

8.4.3	Type – LBS_NetworkDataService – semantics	39
8.4.4	Type – LBS_EventSubscription	40
8.4.5	Type – LBS_MovingObjectManagement	41
8.5	Package – System management	41
8.5.1	Managing users and groups	41
8.5.2	Type – LBS_UserProfileService	41
8.5.3	Type – LBS_LocationTriggerControl	42
8.6	Package – Digital rights management	42
8.6.1	Digital rights management	42
8.6.2	Type – LBS_Resource	43
8.6.3	Type – LBS_License	43
8.6.4	Type – LBS_Right	43
8.6.5	Type – LBS_RightsCondition	44
9	Message Data Model	44
9.1	Semantics	44
9.2	Package – Message Data Types	44
9.2.1	Package structure	44
9.2.2	Type – LanguageSpecificCharacterString	45
9.2.3	Type – LBS_AccessInfo	46
9.2.4	Type – LBS_Accuracy – Class semantics	47
9.2.5	Type – LBS_Address	47
9.2.6	Type – LBS_CostFunction	47
9.2.7	Type – LBS_Data	48
9.2.8	Type – LBS_DataSource	48
9.2.9	Type – LBS_DisplayParameters	49
9.2.10	Type – LBS_EventInfo	50
9.2.11	Type – LBS_Instruction	50
9.2.12	Type – LBS_Location	51
9.2.13	Type – LBS_Maneuver	51
9.2.14	Type – LBS_MapFormat	52
9.2.15	Type – LBS_Notification	52
9.2.16	Type – LBS_Position	53
9.2.17	Type – LBS_Preference	53
9.2.18	Type – LBS_Route	54
9.2.19	Type – LBS_RouteConstraint	55
9.2.20	Type – LBS_RouteCriteria	55
9.2.21	Type – LBS_SecurityCertificate	56
9.2.22	Type – LBS_SymbolSet	57
9.2.23	Type – LBS_TrackingLocation	57
9.2.24	Type – LBS_Trigger	58
9.2.25	Type – LBS_UserID	58
9.2.26	Union – LBS_FeatureData	59
9.2.27	Union – LBS_GeometryChoice	59
9.2.28	Union – LBS_NamedLocation	60
9.2.29	Union – LBS_TrackTrigger	61
Annex A	(normative) Abstract test suite	62
Annex B	(informative) Architecture	66
Annex C	(informative) Scenarios	69
Annex D	(informative) Standards development in LBS	75
Annex E	(informative) Crosswalk between common terminology in ISO/TC 211 and ISO/TC 204	77
Annex F	(informative) Use cases for location-based services	87
Bibliography	91

SS-EN ISO 19132:2008 (E)

Figures

Figure 1 — Relation between LBS and GIS..... viii

Figure 2 — Simplified navigation service represented as an RDF graph 14

Figure 3 — Example of composition of services..... 14

Figure 4 — Overview of UML package structure 16

Figure 5 — Package dependencies to other ISO standards..... 17

Figure 6 — Roles of the Enterprise view 18

Figure 7 — Enterprise view communication channels as associations 19

Figure 8 — License associations for LBS_Participant 19

Figure 9 — LBS_User associations 20

Figure 10 — LBS_ApplicationProvider associations 24

Figure 11 — Service provider associations 25

Figure 12 — Service broker associations 25

Figure 13 — Mobile device associations 26

Figure 14 — Subpackages of LBS_Services..... 27

Figure 15 — Basic services 28

Figure 16 — Context Diagram: LBS_Tracking 29

Figure 17 — Context Diagram: LBS_Routing 30

Figure 18 — Context Diagram: LBS_Navigation 31

Figure 19 — Geomatics services 32

Figure 20 — Context Diagram: LBS_LocationTransformation 33

Figure 21 — Context Diagram: LBS_AddressParsing 34

Figure 22 — Context Diagram: LBS_Geoparsing..... 34

Figure 23 — Context Diagram: LBS_Gazetteer 35

Figure 24 — Context Diagram: LBS_MapService..... 37

Figure 25 — Information services 38

Figure 26 — Context Diagram: LBS_DataService 38

Figure 27 — Context Diagram: LBS_NetworkDataService 39

Figure 28 — Context Diagram: LBS_EventSubscription 40

Figure 29 — Context Diagram: LBS_MovingObjectManagement..... 41

Figure 30 — Context Diagram: LBS_UserProfileService..... 41

Figure 31 — Context Diagram: LBS_LocationTriggerControl..... 42

Figure 32 — Digital rights management types 43

Figure 33 — Message data types 45

Figure 34 — Context diagram: LanguageSpecificCharacterString 46

Figure 35 — Context diagram: LBS_AccessInfo 46

Figure 36 — Context Diagram: LBS_Accuracy..... 47

Figure 37 — Context Diagram: LBS_Address..... 47

Figure 38 — Context Diagram: LBS_CostFunction..... 47

Figure 39 — Context Diagram: LBS_Data	48
Figure 40 — Context Diagram: LBS_DataSource	48
Figure 41 — Context Diagram: LBS_DisplayParameters	49
Figure 42 — Context Diagram: LBS_EventInfo	50
Figure 43 — Context Diagram: LBS_Instruction	51
Figure 44 — Context Diagram: LBS_Location	51
Figure 45 — Context Diagram: LBS_Maneuver	52
Figure 46 — Context Diagram: LBS_MapFormat	52
Figure 47 — Context Diagram: LBS_Notification	53
Figure 48 — Context Diagram: LBS_Position	53
Figure 49 — Context Diagram: LBS_Preference	54
Figure 50 — Context Diagram: LBS_Route	54
Figure 51 — Context Diagram: LBS_RouteConstraint	55
Figure 52 — Context Diagram: LBS_RouteCriteria	56
Figure 53 — Context Diagram: LBS_SecurityCertificate	57
Figure 54 — Context Diagram: LBS_SymbolSet	57
Figure 55 — Context Diagram: LBS_TrackingLocation	58
Figure 56 — Context Diagram: LBS_Trigger	58
Figure 57 — Context Diagram: LBS_UserID	59
Figure 58 — Context Diagram: LBS_FeatureData	59
Figure 59 — Context Diagram: LBS_GeometryChoice	60
Figure 60 — Context Diagram: LBS_NamedLocation	61
Figure 61 — Context Diagram: LBS_TrackTrigger	61
Figure B.1 — Conceptual architecture equating mobile and non-mobile services	66
Figure B.2 — LBS interface schema and tentative standardization items	67

Tables

Table B.1 — Elementary components of LBS	67
Table D.1 — Standards Development Organizations in LBS	75
Table E.1 — Data model terminology	79
Table E.2 — Mathematical terminology	80
Table E.3 — Geodetic terminology	81
Table E.4 — Geometric terminology	83
Table E.5 — World model (feature) terminology	84
Table E.6 — Functional definitions	85

SS-EN ISO 19132:2008 (E)

Foreword

The text of ISO 19132:2007 has been prepared by Technical Committee ISO/TC 211 “Geographic information/Geomatics” of the International Organization for Standardization (ISO) and has been taken over as EN ISO 19132:2008 by Technical Committee CEN/TC 287 “Geographic Information” the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2009, and conflicting national standards shall be withdrawn at the latest by February 2009.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of ISO 19132:2007 has been approved by CEN as a EN ISO 19132:2008 without any modification.

Introduction

This International Standard establishes a framework supporting the development of location-based services (LBS). LBS are software services whose request and response pattern or values depend upon the location of some number of things, either real or conceptual. For example, tracking and navigation as defined in ISO 19133 are both location-based. Emergency response services are location-based since the requested assistance is invariably for a location fairly near the requestor at the time of the request. Environmental monitoring and remediation is dependent on the location and motion or other continuous change of the polluting agents. Even yellow-page directory services are dependent on the location, or tentative future location, of the requestor in search of a convenient business location for the acquisition of specific goods or services, either near his current location or his planned route.

A reference model is a conceptual framework consisting of a set of system decisions, both architectural and policy, which construct the logical environment for a set of applications and processes within a specific domain. A framework contains or references a taxonomy of terms and an ontology that defines the target domain. A framework can contain or reference other frameworks for related application sets or design paradigms. An LBS framework may relate to a framework of geographic information services, since much of its activity is associated to manipulation of location representations and the use of location as a key to other services. Models for frameworks exist at a variety of levels of abstraction, each of which is a generalization of the more detailed model, and a specialization of the more general ones. At the highest level, the only entities are the frameworks representing their respective reference models. This is illustrated in Figure 1.

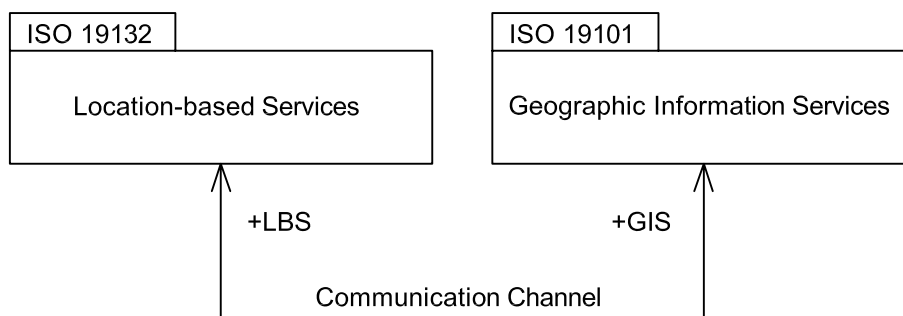


Figure 1 — Relation between LBS and GIS

What this says, in its simplest and most direct terms, is that the two frameworks are coupled and, depending on form more than on functionality, each will invoke services (functions) supplied by the other. This International Standard deals with the communication across the channel depicted in Figure 1. It does so by creating a reference model for the location-based services framework and linking it to the reference model defined in ISO 19101 and ISO/TS 19101-2.

A distinction between an LBS service ¹⁾ and a GIS service ²⁾ is that LBS will normally have a larger granularity and significant non-spatial information component, and therefore is able to interact with both geographic data

1) The term “LBS” includes the word “service”, and so the phrase “LBS service” is logically redundant. When discussing LBSs in relation to other software components, the phrase “LBS service” can be used to maintain symmetry of expression. While logically inconsistent, this is grammatically and poetically acceptable.

2) It would be useful to redefine GIS as “geographic information service”, but past attempts to override the definition of “geographic information system” with “geographic information science” have not proven very fruitful. In this International Standard, all software components are viewed as services, and so mentions of “GIS” will be taken as “service implementation of GIS functionality”.

SS-EN ISO 19132:2008 (E)

frameworks and with general information frameworks containing non-spatial data. Such data may be spatially linked in manners not traditionally used in geographic systems, such as by postal address or telephone number. Another distinction is that LBS services have to deal with the delivery mechanism at a finer level than GIS frameworks. LBS clients are likely to include mobile devices on a multitude of network types, and with a wide variety of capabilities. Thus, an LBS framework supports the same services through a variety of different interface protocols, each tailored for a class of client needs and capabilities. While the details of each client device's interface protocols are beyond the scope of this International Standard, it does address the common semantics of all of the LBS client classes by defining a set of common patterns that provide extensible templates for applications within this domain.

Two of the annexes included in this International Standard are there to highlight the harmonization issue as the LBS domain develops. Organizations that develop standards in LBS need to be aware of other activities. Annex D lists some of the important standards development organizations. Annex E is a crosswalk between common terminology in the geographic information and the intelligent transport system domains. Crosswalks between common terminologies of differing domains are important for semantic interoperability. ITS is used only as an example of one crosswalk.

Geographic information — Location-based services — Reference model

1 Scope

This International Standard defines a reference model and a conceptual framework for location-based services (LBS), and describes the basic principles by which LBS applications may interoperate. This framework references or contains an ontology, a taxonomy, a set of design patterns and a core set of LBS service abstract specifications in UML. This International Standard further specifies the framework's relationship to other frameworks, applications and services for geographic information and to client applications.

This International Standard addresses, for an LBS system, the first three basic viewpoints as defined in the Reference Model for Open Distributed Processing (RM-ODP, see ISO/IEC 10746-1). These viewpoints are the

- a) Enterprise Viewpoint – detailing the purpose, scope, and policies of the system,
- b) Information Viewpoint – detailing the semantics of information and processing within the system,
- c) Computational Viewpoint – detailing the functional decomposition of the system.

The fourth and fifth viewpoints are addressed only in requirements or examples. These are the

- d) Engineering Viewpoint – detailing the infrastructure for distribution,
- e) Technology Viewpoint – detailing the technology for implementation.

Reference models and frameworks can be defined at a variety of levels, from conceptual design to software documentation. This International Standard

- defines the conceptual framework for, and the type of applications included within, LBS,
- establishes general principles for LBS for both mobile and fixed clients,
- specifies the interface for data access while roaming,
- defines the architectural relationship with other ISO geographic information standards,
- identifies areas in which further standards for LBS are required.

This International Standard does not address the following issues:

- rules by which LBS are developed;
- general principles for roaming agreements for mobile clients and tracking targets.

SS-EN ISO 19132:2008 (E)

2 Conformance

Conformance to this International Standard takes on several meanings depending on the type of entity declaring conformance.

- **Semantic conformance** shall imply that the terminology used by the candidate corresponds explicitly to this International Standard where possible.
- **Data conformance** shall imply the usage of data types within application schemas or design specifications that are mappable into types in this International Standard, as in a UML realization of a type by a class.
- **Service conformance** shall imply both the consistent use of message-based request-response interfaces and data conformance for the message packages used by those interfaces.

Conformance may be claimed by a standard, a data structure or schema (such as an encoding definition) or a software module. In all cases, semantics and data conformance are possible. Service conformance is limited to either software or interface specification based on a service-oriented architecture. In service conformance, a data structure may claim this conformance only as part of a larger operational structure (such as the role of XML in SOAP-based SOA applications).

Details for conformance tests are given in Annex A.

3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 19107, *Geographic information — Spatial schema*

ISO 19109, *Geographic information — Rules for application schema*

ISO 19110, *Geographic information — Methodology for feature cataloguing*

ISO 19112, *Geographic information — Spatial referencing by geographic identifiers*

ISO 19133, *Geographic information — Location-based services — Tracking and navigation*

ISO 19136, *Geographic information — Geography Markup Language (GML)*

4 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

4.1

active object

object which is capable of independent actions, and therefore capable of initiating interactions between itself and other objects without immediate prior external stimulation

cf. **passive object** (4.35)

NOTE An active object can represent a **user** or an active **service** that depends on internal (and therefore not visible) triggers to start actions. **Active** and **passive** states can exist for the same object, and such a service can transition between these two states depending on invocation of an activation or deactivation operation protocol.

4.2

basic service

service providing a basic function to other services or applications in a functional manner

cf. **interoperate** (4.18)

NOTE **Basic services** lack any persistent, user-specific state information between invocations and are not meant for direct access by users. Because they act in a functional manner, they are readily replaceable at runtime by other **services** using the same interfaces.

4.3

candidate route

any route that satisfies all constraints of the routing request, with the possible exception of optimality of the cost function

[ISO 19133]

NOTE Navigation is the process of finding the candidate route that optimizes a chosen cost function.

4.4

cluster

collection of **targets** potentially heterogeneous (each satisfying a different query criteria) whose locations fall within a small neighbourhood

4.5

constraint

restriction on how a **link** or **turn** may be traversed by a **vehicle**, such as **vehicle** classification, or a physical or temporal constraint

[ISO 19133]

4.6

continuous change

change in an attribute whose type has a **distance measure** such that its value can be assumed to take on intermediate values between two known measurements

NOTE The interpolation of continuous change is usually done by taking into consideration constraints on the “curve” joining the two data points (time1, value1) and (time2, value2), looking at the value as a function of time. For example, if the continuous change is for the motion of a vehicle, then the constraints of physics and of the paths appropriate for that vehicle must be taken into consideration.

4.7

cost function

function that associates a measure (cost) to a **route**

[ISO 19133]

NOTE The normal mechanism is to apply a cost to each part of a route, and to define the total route cost as the sum of the cost of the parts. This is necessary for the operation of the most common navigation algorithms. The units of cost functions are not limited to monetary costs and values only, but include such measures as time, distance, and possibly others. The only requirement is that the function be additive and at least non-negative. This last criterion can be softened as long as not zero or less cost is associated to any loop in the network, as this will prevent the existence of a “minimal cost” route.

4.8

coupling

linkage of two or more software systems through information transfer or messaging

NOTE 1 Compare with **integration**. While the conceptual schema of the information transferred shall be agreed upon to some level, **coupling** applications can be and are usually flexible in the data representation of that information as long as the semantics content is correct and mappable to some canonical representation of the conceptual schema. The most

SS-EN ISO 19132:2008 (E)

common mapping technology used for XML messages is XSLT, and the transformation stylesheet can be supplied either by the service broker or by the service provider. It is considered a best practice for a service provider to supply his functionality through several logically equivalent messaging APIs, each represented by a different URI linked to an XSLT transformation bridge, and implemented by the same internal code.

NOTE 2 Loose coupling and tight coupling are not at present well-defined terms in the literature. Generally, “tight” coupling means that there is some sort of incurred dependency between requester and responder in the use of the interface, while “loose” means no such dependency. The nature of that dependency is not consistently defined between authors. In that light, “tight” coupling or “tight” integration are both bad practices, and have been viewed as such since the inception of the terms. Some literature refers to **integration** as “tight coupling”, but that is a less accurate description.

4.9 digital item

structured digital object [asset, work, service, data or information] with a standard representation, identification and metadata framework

[ISO 21000-1]

4.10 discrete change

change in an attribute value such that it can be assumed to have changed without having taken intermediate values between two known measurements

NOTE Legal changes of parcel changes are discrete, having occurred at a specific time.

4.11 discrete spatiotemporal object temporal sequence of object representations depicting the same spatial feature at different times

NOTE See Theodoridis, 1999 [31].

4.12 distance measure distance metric

measure of the pairs of values of an attribute type that assigns a numeric value that is positive, symmetric and satisfies the triangular inequality

NOTE A measure “ d ” is positive if $d(x, y) > 0$ for every x, y where $x \neq y$ and $d(x, x) = 0$. A measure “ d ” is symmetric if $d(x, y) = d(y, x)$ for every x, y . A measure “ d ” satisfies the triangular inequality if $d(x, y) \leq d(x, a) + d(a, y)$ for every a, x and y . All numeric or vector valued attributes have such a metric, the most common being the Euclidean metric based on the square root of the sum of the squares of the differences in each dimension. Other non-Euclidean metrics take “curvature of space” into account (such as along the surface of the spheroid).

4.13 geocoding translation of one form of location into another

[ISO 19133]

NOTE Geocoding usually refers to the translation of “address” or “intersection” to “direct position.” Many service providers also include a “reverse geocoding” interface to their geocoder, thus extending the definition of the service as a general translator of location. Because routing services use internal location encodings not usually available to others, a geocoder is an integral part of the internals of such a service.

4.14 identity data sufficient to identify an object over time, independent of its state

NOTE An **identity** is usually a persistent and constant key member attribute value of the **object**. Since it is temporally constant and unique, it will be the same in any **state** associated to the **object** regardless of its **timestamp**. A moving **object's identity** is independent of both time and **location**.

4.15

instantiate

represent (an abstraction) by the creation of a concrete instance or to create the ability to create an instance

[ISO 19133]

NOTE A class or data element definition instantiates a type if it creates the ability to create objects or data elements respectively that can represent the concepts (instance data and/or operations) defined by that type. A class is instantiated by an object if the class defines that object's structure and function. A data schema is instantiated by a data element, if the data schema defines that element's structure.

4.16

integration

linkage of two or more software systems by the use of a common data and method base

cf. **coupling** (4.8)

NOTE **Integration** and **coupling** are the two major mechanisms for the interoperation of systems.

4.17

interoperability

capability to communicate, execute programs, or transfer data among various functional units in a manner that requires the user to have little or no knowledge of the unique characteristics of those units

[ISO/IEC 2382-1]

4.18

interoperate

communicate, execute programs, or transfer data among various functional units in a manner that requires the user to have little or no knowledge of the unique characteristics of those units

cf. **interoperability** (4.17)

4.19

junction

single topological node in a **network** with its associated collection of **turns** and incoming and outgoing **links**

[ISO 19133]

NOTE Junction is an alias for node.

4.20

license

permission or proof of permission granted to a system participant by a competent authority to exercise a **right** which would otherwise be disallowed or unlawful

4.21

linear referencing system

linear positioning system (ISO 19116)

positioning system that measures distance from a reference point along a route (feature)

[ISO 19133]

NOTE The system includes the complete set of procedures for determining and retaining a record of specific points along a linear feature, such as the location reference method(s) together with the procedures for storing, maintaining, and retrieving location information about points and segments on the highways. See *NCHRP Synthesis 21*, 1974 [25].

SS-EN ISO 19132:2008 (E)

4.22

link

directed topological connection between two nodes (**junctions**), consisting of an edge and a direction

[ISO 19133]

NOTE Link is an alias for directed edge.

4.23

link position

position within a network on a **link** defined by some strictly monotonic measure associated with that **link**

[ISO 19133]

NOTE Link positions are often associated to a target feature that is not part of the network. The most common link measures used for this are the distance from start node or address. The most common use of a link position is to geolocate an “address.”

4.24

location

identifiable geographic place

[ISO 19112]

NOTE A location is represented by one of a set of data types that describe a **position**, along with metadata about that data, including coordinates (from a coordinate reference system), a measure (from a **linear referencing system**), or an address (from an address system).

4.25

location-based service

LBS

service whose return or other property is dependent on the **location** of the client requesting the service or of some other thing, object or person

[ISO 19133]

NOTE Queries like “find the nearest restaurant” depend on the location of the questioner and are thus appropriate for an LBS.

4.26

location-dependent service

LDS

service whose availability is dependent upon the **location** of the client

[ISO 19133]

NOTE It is often the case that the supplier of information or services may wish to restrict their usage to particular places. For example, Emergency Services request are often routed through the local supplier to ensure jurisdiction or prompt timing. In another common case, cell phones “roam” among providers of local services dependent on which “cell” they are currently in. Such roaming capability can be applied to any essentially “local” service.

4.27

loosely coupled interface

message-based service interface based on a common taxonomic definition and independent of the particulars of message format or representation and of the internal implementation of the service

cf. **coupling** (4.8)

4.28

main-road rule

set of criteria used at a turn in lieu of a **route instruction**; default instruction used at a **node**

[ISO 19133]

NOTE This rule represents what is “most natural” to do at a node (intersection), given the entry link used. The most common version is “as straight as possible”, or to exit a turn on the most obvious extension of the entry street, which is usually, but not always, the same named street that was the entry. Every node in a route is either associated to an instruction or can be navigated by the main-road rule.

4.29

maneuver US

mancœuvre GB

collection of related **links** and turns used in a **route** in combination

[ISO 19133]

NOTE Maneuvers are used to cluster turns into convenient and legal combinations. They can be as simple as a single turn, a combination of quick turns (“jogs” in the American mid-west, consisting of a turn followed immediately by a turn in the opposite direction) or very complex combinations consisting of entry, exit, and connecting roadways (“magic roundabouts” in the UK).

4.30

motion

change in the **position** of an object over time, represented by change of coordinate values with respect to a particular reference frame

[ISO 19116]

4.31

navigation

combination of **routing**, **route traversal** and **tracking**

[ISO 19133]

NOTE This is essentially the common term “navigation”, but the definition decomposes the process in terms used in the packages defined in this International Standard.

4.32

neighbourhood

geometric set containing a specified direct position in its interior, and containing all direct positions within a specified distance of the specified direct position

[ISO 19107]

4.33

network

abstract structure consisting of a set of 0-dimensional objects called **junctions**, and a set of 1-dimensional objects called **links** that connect the **junctions**, each **link** being associated with a start (origin, source) **junction** and end (destination, sink) **junction**

[ISO 19133]

NOTE The **network** is essentially the universe of discourse for the **navigation** problem. **Networks** are a variety of 1-dimensional topological complex. In this light, junction and topological node are synonyms, as are **link** and directed edge. The two sets of terms come from graph theory and topology, in the field of mathematics. The two fields are logically related but have historically separate roots. Graph theory deals mainly with the algebra of abstract graphs, while topology has its roots in the geometry or network representations. It is beyond the scope and capability of any International Standard to change 150 years of mathematical literature.