

# SVENSK STANDARD

## SS-EN ISO 28199-3:2009

Fastställt/Approved: 2009-09-14  
Publicerad/Published: 2009-10-13  
Utgåva/Edition: 1  
Språk/Language: engelska/English  
ICS: 87.040

---

**Färg och lack – Utvärdering av appliceringsprocessens inverkan på färgskiktets egenskaper –  
Del 3: Visuellt bedömning av täckförmåga samt förekomst av rinning, luftblåsor och nålstick (ISO 28199-3:2009)**

**Paints and varnishes – Evaluation of properties of coating systems related to the application process –  
Part 3: Visual assessment of sagging, formation of bubbles, pinholing and hiding power  
(ISO 28199-3:2009)**

This preview is downloaded from [www.sis.se](http://www.sis.se). Buy the entire standard via <https://www.sis.se/std-70734>

# Hitta rätt produkt och ett leveranssätt som passar dig

## Standarder

Genom att följa gällande standard både effektiviserar och säkrar du ditt arbete. Många standarder ingår dessutom ofta i paket.

## Tjänster

Abonnemang är tjänsten där vi uppdaterar dig med aktuella standarder när förändringar sker på dem du valt att abonnera på.

På så sätt är du säker på att du alltid arbetar efter rätt utgåva.

e-nav är vår online-tjänst som ger dig och dina kollegor tillgång till standarder ni valt att abonnera på dygnet runt. Med e-nav kan samma standard användas av flera personer samtidigt.

## Leveranssätt

Du väljer hur du vill ha dina standarder levererade. Vi kan erbjuda dig dem på papper och som pdf.

## Andra produkter

Vi har böcker som underlättar arbetet att följa en standard. Med våra böcker får du ökad förståelse för hur standarder ska följas och vilka fördelar den ger dig i ditt arbete. Vi tar fram många egna publikationer och fungerar även som återförsäljare. Det gör att du hos oss kan hitta över 500 unika titlar. Vi har även tekniska rapporter, specifikationer och "workshop agreement".

Matriser är en översikt på standarder och handböcker som bör läsas tillsammans. De finns på [sis.se](http://sis.se) och ger dig en bra bild över hur olika produkter hör ihop.

## Standardiseringsprojekt

Du kan påverka innehållet i framtida standarder genom att delta i någon av SIS ca 400 Tekniska Kommittéer.

# Find the right product and the type of delivery that suits you

## Standards

By complying with current standards, you can make your work more efficient and ensure reliability. Also, several of the standards are often supplied in packages.

## Services

Subscription is the service that keeps you up to date with current standards when changes occur in the ones you have chosen to subscribe to. This ensures that you are always working with the right edition.

e-nav is our online service that gives you and your colleagues access to the standards you subscribe to 24 hours a day. With e-nav, the same standards can be used by several people at once.

## Type of delivery

You choose how you want your standards delivered. We can supply them both on paper and as PDF files.

## Other products

We have books that facilitate standards compliance. They make it easier to understand how compliance works and how this benefits you in your operation. We produce many publications of our own, and also act as retailers. This means that we have more than 500 unique titles for you to choose from. We also have technical reports, specifications and workshop agreements.

Matrices, listed at [sis.se](http://sis.se), provide an overview of which publications belong together.

## Standardisation project

You can influence the content of future standards by taking part in one or other of SIS's 400 or so Technical Committees.

Europastandarden EN ISO 28199-3:2009 gäller som svensk standard. Detta dokument innehåller den officiella engelska versionen av EN ISO 28199-3:2009.

The European Standard EN ISO 28199-3:2009 has the status of a Swedish Standard. This document contains the official English version of EN ISO 28199-3:2009.

© Copyright/Upphovsrätten till denna produkt tillhör SIS, Swedish Standards Institute, Stockholm, Sverige. Användningen av denna produkt regleras av slutanvändarlicensen som återfinns i denna produkt, se standardens sista sidor.

© Copyright SIS, Swedish Standards Institute, Stockholm, Sweden. All rights reserved. The use of this product is governed by the end-user licence for this product. You will find the licence in the end of this document.

Upplysningar om sakinnehållet i standarden lämnas av SIS, Swedish Standards Institute, telefon 08-555 520 00.

Standarder kan beställas hos SIS Förlag AB som även lämnar allmänna upplysningar om svensk och utländsk standard.

Information about the content of the standard is available from the Swedish Standards Institute (SIS), tel +46 8 555 520 00.

Standards may be ordered from SIS Förlag AB, who can also provide general information about Swedish and foreign standards.

SIS Förlag AB, SE 118 80 Stockholm, Sweden. Tel: +46 8 555 523 10. Fax: +46 8 555 523 11.

E-mail: [sis.sales@sis.se](mailto:sis.sales@sis.se) Internet: [www.sis.se](http://www.sis.se)



EUROPEAN STANDARD  
NORME EUROPÉENNE  
EUROPÄISCHE NORM

**EN ISO 28199-3**

September 2009

ICS 87.040

English Version

**Paints and varnishes - Evaluation of properties of coating systems related to the application process - Part 3: Visual assessment of sagging, formation of bubbles, pinholing and hiding power (ISO 28199-3:2009)**

Peintures et vernis - Évaluation des propriétés des systèmes de revêtement liées au mode d'application - Partie 3: Évaluation visuelle du festonnage, de la formation de bulles, des piqûres et du pouvoir masquant (ISO 28199-3:2009)

Beschichtungsstoffe - Beurteilung von applikationsbedingter Eigenschaften von Beschichtungssystemen - Teil 3: Visuelle Beurteilung von Ablaufneigung, Kochebildung, Nadelstichbildung und Deckvermögen (ISO 28199-3:2009)

This European Standard was approved by CEN on 21 May 2009.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

**Management Centre: Avenue Marnix 17, B-1000 Brussels**

# Contents

Page

Foreword .....	iv
Introduction.....	v
1 Scope .....	1
2 Normative references.....	1
3 Terms and definitions .....	1
4 Tendency toward sagging .....	1
4.1 General .....	1
4.2 Evaluation.....	3
5 Bubbles.....	3
5.1 General .....	3
5.2 Evaluation.....	3
6 Pinholing .....	3
6.1 General .....	3
6.2 Evaluation.....	3
7 Process hiding power .....	3
7.1 General .....	3
7.2 Evaluation.....	4
8 Test report.....	4
Annex A (informative) Examples of bubbles, pinholes and craters .....	5

## Foreword

This document (EN ISO 28199-3:2009) has been prepared by Technical Committee ISO/TC 35 "Paints and varnishes" in collaboration with Technical Committee CEN/TC 139 "Paints and varnishes" the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2010, and conflicting national standards shall be withdrawn at the latest by March 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

### Endorsement notice

The text of ISO 28199-3:2009 has been approved by CEN as a EN ISO 28199-3:2009 without any modification.

## Introduction

In many areas (e.g. car manufacture, industrial coatings, coatings for plastics) the coating materials used are adapted to the specific application equipment and technologies of the particular user. A coating material is, therefore, to be understood as a semi-manufactured product that only receives its final form in combination with the specific application conditions. The adaptation to the application conditions is therefore decisive for the quality of the coated product.

The test methods specified in ISO 28199 are based on studies by a Working Group of the European Council for Automotive R&D (EUCAR).

They may be used for evaluation of coating materials in research, development and production with regard to their suitability and safety for industrial processes, and error analysis. The properties of coating materials and coatings to be evaluated depend on the film thickness, so a coating system of increasing thickness is applied to a test panel under defined conditions.

The following characteristics are measured (in ISO 28199-1):

- film thickness in accordance with ISO 2808;
- surface texture;
- colour in accordance with ISO 7724 (all parts).

In combination with visual assessment, the following properties are determined:

- colour stability, process hiding power, re-dissolving, overspray absorption, wetting, surface texture and mottling (ISO 28199-2);
- tendency toward sagging, formation of bubbles, pinholing and hiding power (this part of ISO 28199).



# Paints and varnishes — Evaluation of properties of coating systems related to the application process —

Part 3:

## Visual assessment of sagging, formation of bubbles, pinholing and hiding power

**IMPORTANT** — The electronic file of this document contains colours which are considered to be useful for the correct understanding of the document. Users should therefore consider printing this document using a colour printer.

### 1 Scope

This part of ISO 28199 specifies visual methods for the assessment of tendency toward sagging, formation of bubbles, pinholing and hiding power of coating materials applied to a test panel under defined conditions.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6504-3, *Paints and varnishes — Determination of hiding power — Part 3: Determination of contrast ratio of light-coloured paints at a fixed spreading rate*

ISO 28199-1:2009, *Paints and varnishes — Evaluation of properties of coating systems related to the application process — Part 1: Relevant vocabulary and preparation of test panels*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 28199-1 apply.


### 4 Tendency toward sagging

#### 4.1 General

The tendency toward sagging is determined by visual assessment of the sag. This assessment is made after drying/curing of the coating, on a panel prepared in accordance with Version A in ISO 28199-1:2009.

If a tendency toward sagging is already visible in the liquid layer, this should be marked at the edge of the panel.

Film thickness is determined using the values measured in accordance with 9.4.2 of ISO 28199-1:2009.

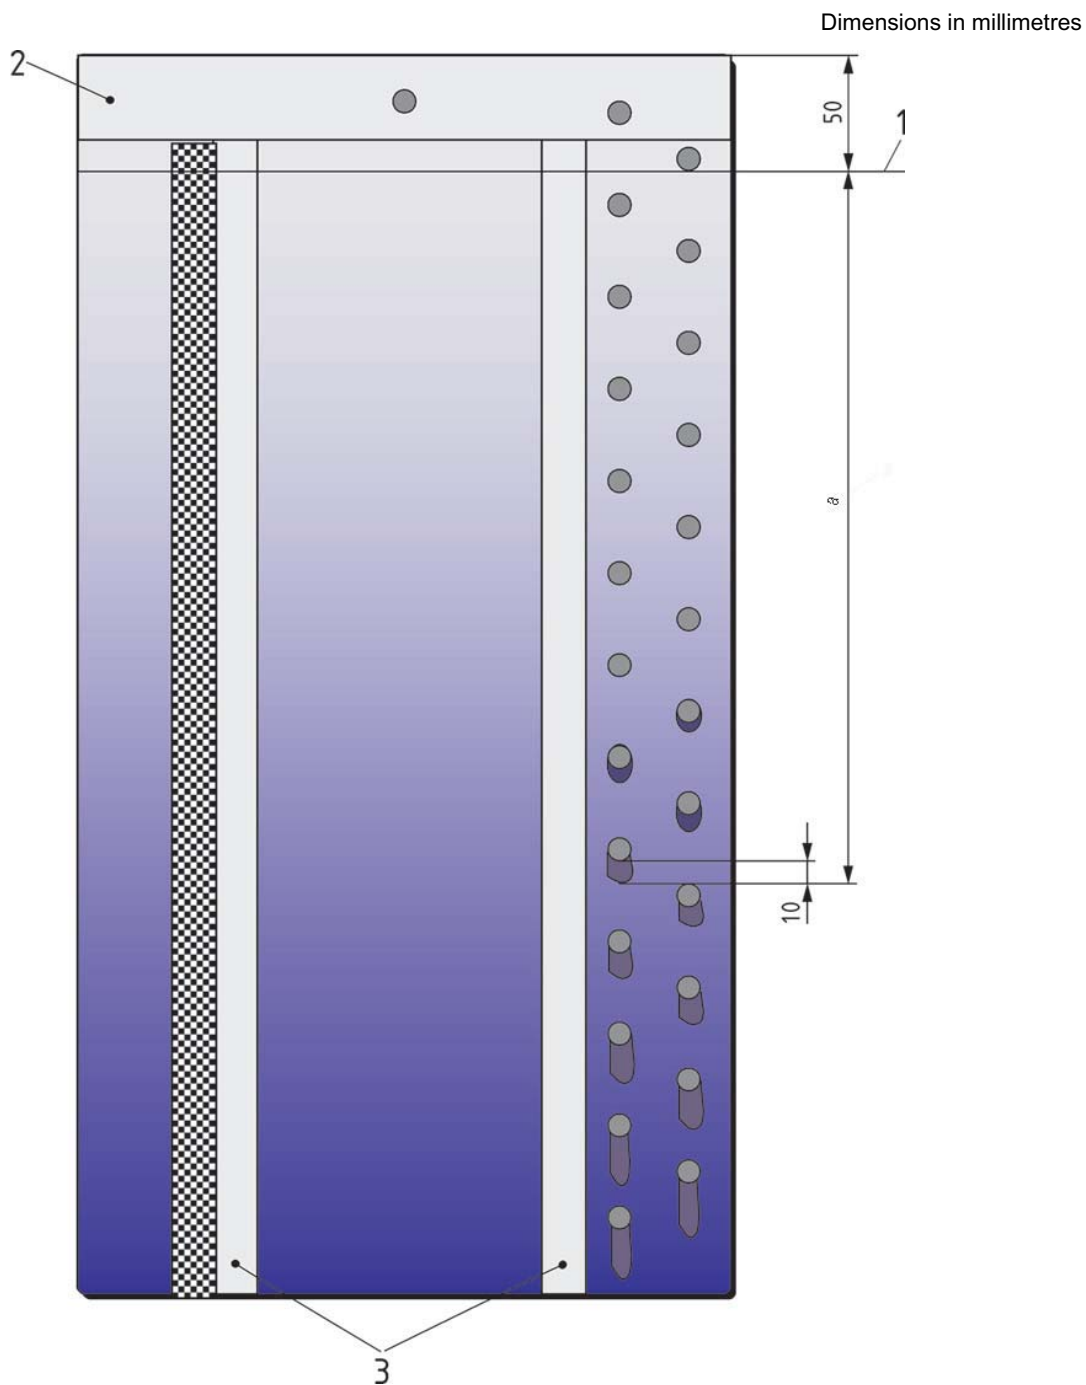

**Key**

- 1 measuring series 1
- 2 coil-coated reference strip
- 3 clear-coated reference strip
- a* distance from start of coating to 10-mm sag

**Figure 1 — Assessment of sagging**

## 4.2 Evaluation

After drying/curing of the coating, visually assess the perforated area of the test panel (see ISO 28199-1:2009, Figure 2) for the determination of the tendency to sagging. Determine the hole at which the sag exceeds a length of 10 mm from the lower edge of the hole (see Figure 1), and determine the film thickness corresponding to that hole in accordance with 9.4.2 of ISO 28199-1:2009. The greater the distance  $a$  for a given film thickness, the less the tendency of the coating to sag. A control chart of film thickness vs distance  $a$  can assist in this evaluation.

Other lengths of sag for measuring film thickness may be agreed by interested parties.

## 5 Bubbles

### 5.1 General

Assessment of the bubble formation limit is made visually after drying/curing of the coating. Examples of bubbles in a coating material are shown in Figures A.1 and A.2.

The film thickness values are determined in accordance with 9.4.2 of ISO 28199-1:2009.

### 5.2 Evaluation

After drying/curing of the coating, assess the bubble formation limit (see 3.2 of ISO 28199-1:2009) visually in the range of the film thickness pattern in the wedge area (see ISO 28199-1:2009, Figure 5 and Figure 6).

Determine the film thickness which corresponds to this bubble formation limit by using the film thickness measurement pattern.

## 6 Pinholing

### 6.1 General

Assessment of the pinholing limit is made visually after drying/curing of the coating. Examples of pinholes in a coating material are shown in Figures A.3 to A.6.

The film thickness values are determined in accordance with 9.4.2 of ISO 28199-1:2009.

### 6.2 Evaluation

After drying/curing of the coating, assess the pinholing limit (see 3.11 of ISO 28199-1:2009) visually in the range of the film thickness pattern in the wedge area (see ISO 28199-1:2009, Figure 5 and Figure 6).

Using the film thickness measurement pattern, determine the film thickness corresponding to this pinholing limit.

## 7 Process hiding power

### 7.1 General

Assessment of the process hiding power (see ISO 28199-1:2009, 3.12) is made visually after drying/curing of the coating.

The film thickness values are determined in accordance with 9.4.2 of ISO 28199-1:2009.