


# SVENSK STANDARD

## SS-ISO 21250-1:2020

**Rolling bearings – Noise testing of rolling bearing greases –  
Part 1: Basic principles, testing assembly and test machine  
(ISO 21250-1:2020, IDT)**

**Rolling bearings – Noise testing of rolling bearing greases –  
Part 1: Basic principles, testing assembly and test machine  
(ISO 21250-1:2020, IDT)**

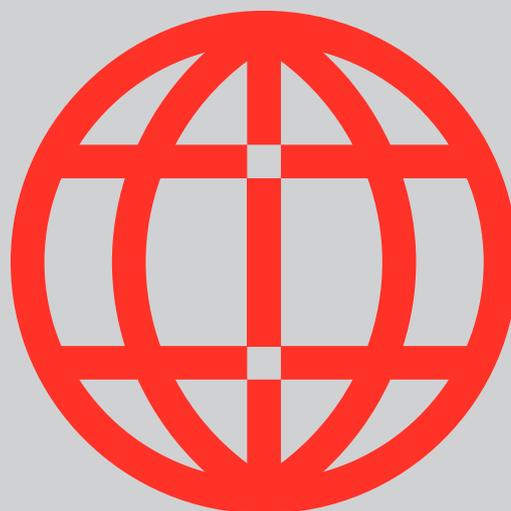

**sis** Svenska  
Institutet för  
Standarder

Language: engelska/English

Edition: 1

This preview is downloaded from [www.sis.se](http://www.sis.se). Buy the entire standard via <https://www.sis.se/std-80023861>

Den här standarden kan hjälpa dig att effektivisera och kvalitetssäkra ditt arbete. SIS har fler tjänster att erbjuda dig för att underlätta tillämpningen av standarder i din verksamhet.

#### **SIS Abonnemang**

Snabb och enkel åtkomst till gällande standard med SIS Abonnemang, en prenumerationstjänst genom vilken din organisation får tillgång till all världens standarder, senaste uppdateringarna och där hela din organisation kan ta del av innehållet i prenumerationen.

#### **Utbildning, event och publikationer**

Vi erbjuder även utbildningar, rådgivning och event kring våra mest sålda standarder och frågor kopplade till utveckling av standarder. Vi ger också ut handböcker som underlättar ditt arbete med att använda en specifik standard.

#### **Vill du delta i ett standardiseringsprojekt?**

Genom att delta som expert i någon av SIS 300 tekniska kommittéer inom CEN (europeisk standardisering) och/eller ISO (internationell standardisering) har du möjlighet att påverka standardiseringsarbetet i frågor som är viktiga för din organisation. Välkommen att kontakta SIS för att få veta mer!

#### **Kontakt**

Skriv till [kundservice@sis.se](mailto:kundservice@sis.se), besök [sis.se](https://www.sis.se) eller ring 08 - 555 523 10

---

© Copyright/Upphovsrätten till denna produkt tillhör Svenska institutet för standarder, Stockholm, Sverige. Upphovsrätten och användningen av denna produkt regleras i slutanvändarlicensen som återfinns på [sis.se/slutanvandarlicens](https://www.sis.se/slutanvandarlicens) och som du automatiskt blir bunden av när du använder produkten. För ordlista och förkortningar se [sis.se/ordlista](https://www.sis.se/ordlista).

© Copyright Svenska institutet för standarder, Stockholm, Sweden. All rights reserved. The copyright and use of this product is governed by the end-user licence agreement which you automatically will be bound to when using the product. You will find the licence at [sis.se/enduserlicenseagreement](https://www.sis.se/enduserlicenseagreement).

Upplysningar om sakinnehållet i standarden lämnas av Svenska institutet för standarder, telefon 08 - 555 520 00. Standarder kan beställas hos SIS som även lämnar allmänna upplysningar om svensk och utländsk standard.

Standarden är framtagen av kommittén för Rullningslager, SIS/TK 105.

Har du synpunkter på innehållet i den här standarden, vill du delta i ett kommande revideringsarbete eller vara med och ta fram andra standarder inom området? Gå in på [www.sis.se](https://www.sis.se) - där hittar du mer information.

Den internationella standarden ISO 21250-1:2020 gäller som svensk standard. Detta dokument innehåller den officiella engelska versionen av ISO 21250-1:2020.

The International Standard ISO 21250-1:2020 has the status of a Swedish Standard. This document contains the official English version of ISO 21250-1:2020.

# Contents

Page

<b>Foreword .....</b>	<b>v</b>
<b>Introduction .....</b>	<b>vi</b>
<b>1 Scope.....</b>	<b>1</b>
<b>2 Normative references .....</b>	<b>1</b>
<b>3 Terms and definitions.....</b>	<b>1</b>
<b>4 Symbols, abbreviated terms and subscripts .....</b>	<b>2</b>
<b>5 Basics.....</b>	<b>3</b>
<b>6 Grease noise evaluation method.....</b>	<b>3</b>
6.1 General and overview .....	3
6.2 Calculation method for the grease damping.....	4
6.3 Calculation method for peak analysis.....	5
6.4 Calculation for SUN analysis .....	7
<b>7 Noise testing of greases .....</b>	<b>7</b>
7.1 General information .....	7
7.2 Measuring principle.....	8
7.3 Test machine .....	8
7.4 Test setup .....	8
7.5 Test bearings and amount of grease.....	8
7.6 Test load.....	9
7.7 Spindle speed .....	9
7.8 Signal recording.....	9
7.9 Display.....	10
<b>8 Calibration .....</b>	<b>10</b>
8.1 General .....	10
8.2 Calibration levels .....	11
8.3 Calibration means.....	11
<b>9 Error estimation .....</b>	<b>11</b>
<b>Bibliography.....</b>	<b>13</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 4, *Rolling bearings*.

A list of all parts in the ISO 21250 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

The rolling bearing life theory emphasizes the use of pure and homogeneous lubricants as essential for a long bearing service life. The lubrication of rolling bearings is described in several national standards. The GfT worksheet 3<sup>[1]</sup> contains theoretical and practical knowledge of rolling bearing lubrication.

Grease lubrication is the most common type of rolling bearing lubrication. The purity grade of bearing grease is influenced by thickeners, base oils, additives and solid lubricant additives as well as the manufacturing process and is reflected in the running noise. Therefore, noise testing of rolling bearing greases is recommended.

In addition, grease noise testing in accordance with this document allows the grease manufacturers to develop low-noise lubricants with better damping properties. This document can also support the rolling bearing manufacturers and end-users in the selection of low noise grease with better damping properties.

This document covers basic principles, requirements for the testing assembly and the test machine to determine and assess the noise characteristics of bearing grease jointly with ISO 21250-2, ISO 21250-3 and ISO 21250-4.

## 1 Scope

This document specifies:

- basic principles, testing assembly and the test machine for noise testing of rolling bearing greases;
- symbols used in the test methods BQ+, MQ and NQ.

This document is applicable for testing rolling bearing greases, especially of unused grease.

NOTE Suitable greases are greases of NLGI classes 1 to 3 according to DIN 51818[6]. Suitable greases for lubrication of rolling bearings are especially greases according to ISO 12924. The test method according to this document delivers meaningful results for rolling bearings; however, it can also be applied for greases in similar applications[12][13].

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 492, *Rolling bearings — Radial bearings — Geometrical product specifications (GPS) and tolerance values*

ISO 5593, *Rolling bearings — Vocabulary*

ISO 5753-1, *Rolling bearings — Internal clearance — Part 1: Radial internal clearance for radial bearings*

ISO 15242-1:2015, *Rolling bearings — Measuring methods for vibration — Part 1: Fundamentals*

ISO 21250-2, *Rolling bearings — Noise test of rolling bearing greases — Part 2: Test and evaluation method BQ+*

ISO 21250-3, *Rolling bearings — Noise test of rolling bearing greases — Part 3: Test and evaluation method MQ*

ISO 21250-4, *Rolling bearings — Noise test of rolling bearing greases — Part 4: Test and evaluation method NQ*

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5593, ISO 15242-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

### 3.1

#### noise

vibration that is a random mechanical energy process of spectral density varying continuously with frequency and perceived as acoustic actions that are neither acoustic shocks nor a series of harmonic tones nor complex tones and which are substantially uniform over time

Note 1 to entry: Noise can be represented mathematically, that is as Fourier integral which can be expressed as the sum of a series of plain vibrations. Its distinguishing characteristic, as opposed to other acoustic actions with discrete frequencies, is a spectrum with irregular amplitudes of each frequency.

SS-ISO 21250-1:2020 (E)

**3.2 start-up noise**

$v_{SUN}$   
noise (3.1) at the start of the bearing testing

**3.3 noise level**

$v_{NL}$   
noise (3.1) of the bearing calculated as the average value or rms of measuring points

Note 1 to entry: The number of measuring points and measuring time depend on the test method.

**3.4 noise peak**

$v_{NP}$   
peak value of the bearing noise (3.1)

**3.5 peak count**

number of peak signals exceeding a defined threshold level

**3.6 calibrator**

measurement standard that provides a sinusoidal vibration speed at certain frequencies and defined amplitudes

**3.7 grease damping**

$GD$   
attenuating effect of the lubricant, which is related to the vibration excitation of the bearing

**4 Symbols, abbreviated terms and subscripts**

The symbols and abbreviated terms contained in Table 1 and the subscripts contained in Table 2 apply to the noise testing of greases according to test methods BQ+, MQ and NQ.

**Table 1 — Symbols and abbreviated terms**

Symbol	Unit	Description
BQ <sup>+a</sup>	—	Method BQ+ according to ISO 21250-2
$GD$	—	Grease damping
H <sup>a</sup>	—	High band, H-band (1 800 Hz to 10 000 Hz)
$i^a$	—	Consecutive number
L <sup>a,b</sup>	—	Low band, L-band (50 Hz to 300 Hz)
M <sup>a</sup>	—	Medium band, M-band (300 Hz to 1 800 Hz)
MQ <sup>a</sup>	—	Method MQ according to ISO 21250-3
M&H <sup>a</sup>	—	Medium band and high band, M&H band (300 Hz to 10 000 Hz)
$n$	—	Number of noise counts
NQ <sup>a</sup>	—	Method NQ according to ISO 21250-4
$v$	$\mu\text{m}\cdot\text{s}^{-1}$	Vibration velocity
$\bar{v}_i$	$\mu\text{m}\cdot\text{s}^{-1}$	Vibration velocity, twice smoothed to the counting point $i$

<sup>a</sup> Can be used as subscript, too, where necessary.

<sup>b</sup> The L-band is used in noise and vibration analysis in the ISO 15242 series. However, this document does not consider this frequency range for grease noise testing and its analysis.

**Table 2 — Subscripts**

Subscript-symbol	Description
grease <sup>a</sup>	Greased bearing
NL <sup>b</sup>	Noise level, average value (of vibration velocity)
normal	Acceptable level of normal noise, greased bearing
NP <sup>b</sup>	Noise peak
pk	Peak value
ref	Reference, ungreased bearing
rms	Root mean square value of sinusoidal signal which has the same amplitude with actual peak value range of raceway noise
0–32	Starting interval 0 s to 32 s
32–64	Operating interval 32 s to 64 s
SUN <sup>b</sup>	Start-up noise of the greased bearing
<sup>a</sup> This subscript usually is not written (default). <sup>b</sup> In the MQ method, noise values with this subscript can be expressed in $\mu\text{m}\cdot\text{s}^{-1}$ or in % based on the reference value of $16,9 \mu\text{m}\cdot\text{s}^{-1}$ .	

## 5 Basics

In the case of grease lubrication, many factors can affect the degree of cleanliness during operation. For the initial lubrication and relubrication, clean grease is always required. Also, in applications where the fatigue life is not an issue (e.g. at very low load), the use of clean greases can be extremely important, for example, as a contribution to a low bearing noise, which is required for applications such as electric motors, fans, etc.

The purpose of assessing grease noise is the determination of the grease noise quality or identifying low-noise (quieter) greases. It can contribute to the development and improvement of low noise grease as well as support.

The comparison of damping properties of different lubricants shall be made on one bearing type and size, and the bearing shall be mounted in the same way. If all these provisions are followed, the selection of the lubricant with optimum damping characteristics can be performed successfully.

It has been found that many factors within the lubricant contribute to the attenuation. For greases, the main parameters are the viscosity, the type of base oil and additive types used. An improvement of damping characteristics can be observed when increasing the base oil viscosity. In addition, the thickener type and its micro-structure, as well as additives, can cause irregular damping properties.

NOTE 1 When abrasive or hard particles (impurities) are over-rolled, raceways (tracks) are damaged. It can result in indentations and increase the stress level (see also ISO 15243). Thus, the fatigue process is accelerated, leading to surface distress including asperity related micro-cracks and micro-spalls where material is released. This in turn leads to noise increase and finally bearing fatigue and bearing failure. In ISO 281, the existence of contamination is described by the factor  $e_c$  and incorporated in the life modification factor  $a_{ISO}$ .

NOTE 2 Currently, no sufficient evidence about noise testing of used greases is existing. Therefore, this document is primarily intended for testing of unused greases.

## 6 Grease noise evaluation method

### 6.1 General and overview

The evaluation method of the grease noise is as follows:

- rotate the deep groove ball bearing in which testing grease is enclosed, and

— analyse the vibration frequencies of the bearing.

The analysis method of grease noise varies with each method. [Table 3](#) gives an overview of the features of the methods.

**Table 3 — Features of each measuring method**

Feature	Method		
	BQ+	MQ	NQ
Transducer	moving coil type		
Rotational frequency (spindle speed) in min <sup>-1</sup>	1 800 <sup>a</sup>		
Frequency domain in Hz	300 to 1 800 (M-band) 1 800 to 10 000 (H-band)	300 to 1 800 (M-band) 1 800 to 10 000 (H-band)	300 to 10 000 (M&H-band)
Filter 1 <sup>b</sup>	800 to 10 000 Hz	—	—
Filter 2 <sup>b</sup>	25 to 400 Hz	—	—
Measuring duration in s	3,2	0 to 32/32 to 64	3/10/30/120
Criterion for classification of grease noise	peak level (and “damping factor”)	worse value of “standard deviation of peak level” and/or “grease damping factor”	peak count
<sup>a</sup> Inner ring rotation, outer ring stationary. <sup>b</sup> Envelope for peak value.			

## 6.2 Calculation method for the grease damping

Grease damping *GD* compares the noise level of a greased bearing  $v_{NL}$  with a reference  $v_{NL, ref}$  (ungreased bearing with preservative).

The comparison of the two levels  $v_{NL}$  and  $v_{NL, ref}$  may be performed by ratio, see Formula (1), or by difference/ratio, see Formula (2):

$$\text{by ratio} \quad GD = \frac{v_{NL, ref}}{v_{NL}} \tag{1}$$

$$\text{by difference/ratio} \quad GD = \frac{v_{NL, ref} - v_{NL}}{v_{NL, ref}} \tag{2}$$

The grease damping *GD* may be performed in the different bands (M, H). To distinguish them, the corresponding term is added as subscript.

Grease damping for the different test methods shall be calculated in accordance with [Table 4](#). For method NQ, the determination of a grease damping factor is not foreseen.

**Table 4 — Grease damping calculation**

Band	BQ+ <sup>a</sup> for assessment in accordance with ISO 21250-2	Formula No.	MQ <sup>b</sup> for assessment in accordance with ISO 21250-3	Formula No.	NQ
M	$GD_{M\ BQ+} = \frac{V_{NL, M\ ref} - V_{NL, M}}{V_{NL, M\ ref}}$	(3)	$GD_{M\ MQ} = \frac{\frac{1}{256} \cdot \sum_{i=257}^{512} V_{NL, M\ i\ ref}}{\frac{1}{256} \cdot \sum_{i=257}^{512} V_{NL, M\ i}}$	(5)	Not applicable
H	$GD_{H\ BQ+} = \frac{V_{NL, H\ ref} - V_{NL, H}}{V_{NL, H\ ref}}$	(4)	$GD_{H\ MQ} = \frac{\frac{1}{256} \cdot \sum_{i=257}^{512} V_{NL, H\ i\ ref}}{\frac{1}{256} \cdot \sum_{i=257}^{512} V_{NL, H\ i}}$	(6)	Not applicable
<sup>a</sup> Negative values for $GD_{BQ+}$ mean an increase in noise for the greased bearings. <sup>b</sup> Values < 1 for $GD_{MQ}$ mean an increase in noise for the greased bearings.					

### 6.3 Calculation method for peak analysis

The peak analysis is performed by a mathematical treatment of the input signal:

- raw/input signal coming from the transducer;
- filtered signal: the signal after filtration;
- the filter used shall be indicated in the result;
- rectification: all amplitudes are set to positive;
- counter: the number of vibrations peaks over a reference value that shall be indicated in the result.

Peak values for the evaluation of the running noise for the different test methods shall be calculated in accordance with [Table 5](#) and [Figure 1](#).