

SVENSK STANDARD

SS-EN ISO 5167-5:2016



Fastställt/Approved: 2016-04-04
Publicerad/Published: 2016-04-12
Utgåva/Edition: 1
Språk/Language: engelska/English
ICS: 17.120.10

Measurement of fluid flow by means of pressure differential devices inserted in circular cross-section conduits running full – Part 5: Cone meters (ISO 5167-5:2016)

This preview is downloaded from www.sis.se. Buy the entire standard via <https://www.sis.se/std-8019764>

Standarder får världen att fungera

SIS (Swedish Standards Institute) är en fristående ideell förening med medlemmar från både privat och offentlig sektor. Vi är en del av det europeiska och globala nätverk som utarbetar internationella standarder. Standarder är dokumenterad kunskap utvecklad av framstående aktörer inom industri, näringsliv och samhälle och befrämjar handel över gränser, bidrar till att processer och produkter blir säkrare samt effektiviserar din verksamhet.

Delta och påverka

Som medlem i SIS har du möjlighet att påverka framtida standarder inom ditt område på nationell, europeisk och global nivå. Du får samtidigt tillgång till tidig information om utvecklingen inom din bransch.


Ta del av det färdiga arbetet

Vi erbjuder våra kunder allt som rör standarder och deras tillämpning. Hos oss kan du köpa alla publikationer du behöver – allt från enskilda standarder, tekniska rapporter och standardpaket till handböcker och onlinetjänster. Genom vår webbtjänst e-nav får du tillgång till ett lättnavigerat bibliotek där alla standarder som är aktuella för ditt företag finns tillgängliga. Standarder och handböcker är källor till kunskap. Vi säljer dem.

Utveckla din kompetens och lyckas bättre i ditt arbete

Hos SIS kan du gå öppna eller företagsinterna utbildningar kring innehåll och tillämpning av standarder. Genom vår närhet till den internationella utvecklingen och ISO får du rätt kunskap i rätt tid, direkt från källan. Med vår kunskap om standarders möjligheter hjälper vi våra kunder att skapa verklig nytta och lönsamhet i sina verksamheter.

Vill du veta mer om SIS eller hur standarder kan effektivisera din verksamhet är du välkommen in på www.sis.se eller ta kontakt med oss på tel 08-555 523 00.



Standards make the world go round

SIS (Swedish Standards Institute) is an independent non-profit organisation with members from both the private and public sectors. We are part of the European and global network that draws up international standards. Standards consist of documented knowledge developed by prominent actors within the industry, business world and society. They promote cross-border trade, they help to make processes and products safer and they streamline your organisation.

Take part and have influence

As a member of SIS you will have the possibility to participate in standardization activities on national, European and global level. The membership in SIS will give you the opportunity to influence future standards and gain access to early stage information about developments within your field.

Get to know the finished work

We offer our customers everything in connection with standards and their application. You can purchase all the publications you need from us - everything from individual standards, technical reports and standard packages through to manuals and online services. Our web service e-nav gives you access to an easy-to-navigate library where all standards that are relevant to your company are available. Standards and manuals are sources of knowledge. We sell them.

Increase understanding and improve perception

With SIS you can undergo either shared or in-house training in the content and application of standards. Thanks to our proximity to international development and ISO you receive the right knowledge at the right time, direct from the source. With our knowledge about the potential of standards, we assist our customers in creating tangible benefit and profitability in their organisations.

If you want to know more about SIS, or how standards can streamline your organisation, please visit www.sis.se or contact us on phone +46 (0)8-555 523 00



Europastandarden EN ISO 5167-5:2016 gäller som svensk standard. Detta dokument innehåller den officiella engelska versionen av EN ISO 5167-5:2016.

The European Standard EN ISO 5167-5:2016 has the status of a Swedish Standard. This document contains the official English version of EN ISO 5167-5:2016.

**Förhållandet till övriga delar under samma huvudtitel - Utdrag ur Förord i ISO 5167-5:2016/
Relations to other parts under the same general title - Extract from the Foreword of ISO 5167-5:2016**

ISO 5167 consists of the following parts, under the general title *Measurement of fluid flow by means of pressure differential devices inserted in circular cross-section conduits running full*:

- Part 1: General principles and requirements
- Part 2: Orifice plates
- Part 3: Nozzles and Venturi nozzles
- Part 4: Venturi tubes
- Part 5: Cone meters

© Copyright/Upphovsrätten till denna produkt tillhör SIS, Swedish Standards Institute, Stockholm, Sverige. Användningen av denna produkt regleras av slutanvändarlicensen som återfinns i denna produkt, se standardens sista sidor.

© Copyright SIS, Swedish Standards Institute, Stockholm, Sweden. All rights reserved. The use of this product is governed by the end-user licence for this product. You will find the licence in the end of this document.

Upplysningar om sakinnehållet i standarden lämnas av SIS, Swedish Standards Institute, telefon 08-555 520 00. Standarder kan beställas hos SIS Förlag AB som även lämnar allmänna upplysningar om svensk och utländsk standard.

Information about the content of the standard is available from the Swedish Standards Institute (SIS), telephone +46 8 555 520 00. Standards may be ordered from SIS Förlag AB, who can also provide general information about Swedish and foreign standards.

Har du synpunkter på innehållet i den här standarden, vill du delta i ett kommande revideringsarbete eller vara med och ta fram andra standarder inom området? Gå in på www.sis.se - där hittar du mer information.

EUROPEAN STANDARD

EN ISO 5167-5

NORME EUROPÉENNE

EUROPÄISCHE NORM

March 2016

ICS 17.120.10

English Version

Measurement of fluid flow by means of pressure differential devices inserted in circular cross-section conduits running full - Part 5: Cone meters (ISO 5167-5:2016)

Mesure de débit des fluides au moyen d'appareils déprimogènes insérés dans des conduites en charge de section circulaire - Partie 5: Cônes de mesure (ISO 5167-5:2016)

Durchflussmessung von Fluiden mit Drosselgeräten in voll durchströmten Leitungen mit Kreisquerschnitt - Teil 5: Konus-Durchflussmesser (ISO 5167-5:2016)

This European Standard was approved by CEN on 4 February 2016.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

	Page
European foreword	
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Principles of the method of measurement and computation	2
5 Cone meters	3
5.1 Field of application.....	3
5.2 General shape.....	4
5.3 Material and manufacture.....	7
5.4 Pressure tappings.....	8
5.5 Discharge coefficient, C	8
5.5.1 Limits of use.....	8
5.5.2 Discharge coefficient of the cone meter.....	8
5.6 Expansibility (expansion) factor, ε	9
5.7 Uncertainty of the discharge coefficient, C	9
5.8 Uncertainty of the expansibility (expansion) factor, ε	9
5.9 Pressure loss.....	9
6 Installation requirements	10
6.1 General.....	10
6.2 Minimum upstream and downstream straight lengths for installations between various fittings and the cone meter.....	10
6.2.1 General.....	10
6.2.2 Single 90° bend.....	11
6.2.3 Two 90° bends in perpendicular planes.....	11
6.2.4 Concentric expander.....	11
6.2.5 Partially closed valves.....	11
6.3 Additional specific installation requirements for cone meters.....	11
6.3.1 Circularity and cylindricity of the pipe.....	11
6.3.2 Roughness of the upstream and downstream pipe.....	11
6.3.3 Positioning of a thermowell.....	11
7 Flow calibration of cone meters	12
7.1 General.....	12
7.2 Test facility.....	12
7.3 Meter installation.....	12
7.4 Design of the test programme.....	12
7.5 Reporting the calibration results.....	13
7.6 Uncertainty analysis of the calibration.....	13
7.6.1 General.....	13
7.6.2 Uncertainty of the test facility.....	13
7.6.3 Uncertainty of the cone meter.....	13
Annex A (informative) Table of expansibility (expansion) factor	14
Bibliography	15

European foreword

This document (EN ISO 5167-5:2016) has been prepared by Technical Committee ISO/TC 30 "Measurement of fluid flow in closed conduits".

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by September 2016, and conflicting national standards shall be withdrawn at the latest by September 2016.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO 5167-5:2016 has been approved by CEN as EN ISO 5167-5:2016 without any modification.

Introduction

This International Standard, divided into five parts, covers the geometry and method of use (installation and operating conditions) of orifice plates, nozzles, Venturi tubes, and cone meters when they are inserted in a conduit running full to determine the flow rate of the fluid in the conduit. It also gives necessary information for calculating the flow rate and its associated uncertainty.

This International Standard is applicable only to pressure differential devices in which the flow remains subsonic throughout the measuring section and where the fluid can be considered as single-phase, but it is not applicable to the measurement of pulsating flow. Furthermore, each of these devices can only be used within specified limits of pipe size and Reynolds number.

This International Standard deals with devices for which direct calibration experiments have been made sufficient in number, spread, and quality to enable coherent systems of application to be based on their results and coefficients to be given with certain predictable limits of uncertainty. However, for cone meters calibrated in accordance with [Clause 7](#), a wider range of pipe size, β , and Reynolds number may be considered.

The devices introduced into the pipe are called “primary devices”. The term primary device also includes the pressure tapplings. All other instruments or devices required for the measurement are known as “secondary devices”. This International Standard covers primary devices; secondary devices^{[1][5]} will be mentioned only occasionally.

This International Standard is divided into the following five parts:

- a) ISO 5167-1 gives general terms and definitions, symbols, principles, and requirements as well as methods of measurement and uncertainty that are to be used in conjunction with ISO 5167-1, ISO 5167-2, ISO 5167-3, ISO 5167-4, and ISO 5167-5.
- b) ISO 5167-2 specifies requirements for orifice plates, which can be used with corner pressure tapplings, D and $D/2$ pressure tapplings¹⁾, and flange pressure tapplings.
- c) ISO 5167-3 specifies requirements for ISA 1932 nozzles²⁾, long radius nozzles, and Venturi nozzles, which differ in shape and in the position of the pressure tapplings.
- d) ISO 5167-4 specifies requirements for classical Venturi tubes³⁾.
- e) This part of ISO 5167 specifies requirements for cone meters and includes a section on calibration.

Aspects of safety are not dealt with in ISO 5167 (all parts). It is the responsibility of the user to ensure that the system meets applicable safety regulations.

1) Orifice plates with ‘vena contracta’ pressure tapplings are not considered in ISO 5167 (all parts).

2) ISA is the abbreviation for the International Federation of the National Standardizing Associations, which was succeeded by ISO in 1946.

3) In the USA, the classical Venturi tube is sometimes called the Herschel Venturi tube.

Measurement of fluid flow by means of pressure differential devices inserted in circular cross-section conduits running full —

Part 5: Cone meters

1 Scope

This part of ISO 5167 specifies the geometry and method of use (installation and operating conditions) of cone meters when they are inserted in a conduit running full to determine the flow rate of the fluid flowing in the conduit.

As the uncertainty of an uncalibrated cone meter might be too high for a particular application, it might be deemed essential to calibrate the flow meter in accordance with [Clause 7](#).

This part of ISO 5167 also provides background information for calculating the flow rate and is applicable in conjunction with the requirements given in ISO 5167-1.

This part of ISO 5167 is applicable only to cone meters in which the flow remains subsonic throughout the measuring section and where the fluid can be considered as single-phase. Uncalibrated cone meters can only be used within specified limits of pipe size, roughness, β , and Reynolds number. This part of ISO 5167 is not applicable to the measurement of pulsating flow. It does not cover the use of uncalibrated cone meters in pipes sized less than 50 mm or more than 500 mm, or where the pipe Reynolds numbers are below 8×10^4 or greater than $1,2 \times 10^7$.

A cone meter is a primary device which consists of a cone-shaped restriction held concentrically in the centre of the pipe with the nose of the cone upstream. The design of cone meter defined in this part of ISO 5167 has one or more upstream pressure tappings in the wall, and a downstream pressure tapping positioned in the back face of the cone with the connection to a differential pressure transmitter being a hole through the cone to the support bar, and then up through the support bar.

Alternative designs of cone meters are available; however, at the time of writing, there is insufficient data to fully characterize these devices, and therefore, these meters shall be calibrated in accordance with [Clause 7](#).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4006, *Measurement of fluid flow in closed conduits — Vocabulary and symbols*

ISO 5167-1:2003, *Measurement of fluid flow by means of pressure differential devices inserted in circular cross-section conduits running full — Part 1: General principles and requirements*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 4006, ISO 5167-1, and the following apply.

**3.1
beta edge**

maximum circumference of the cone

4 Principles of the method of measurement and computation

The principle of the method of measurement is based on the installation of the cone meter into a pipeline in which a fluid is running full. Flow through a cone meter produces a differential pressure between the upstream and downstream tappings.


The mass flow rate can be determined by Formulae (1) and (2):

$$q_m = \frac{C}{\sqrt{1 - \beta^4}} \varepsilon \frac{\pi}{4} (D\beta)^2 \sqrt{2\Delta p \rho_1} \tag{1}$$

and

$$\beta = \sqrt{1 - \frac{d_c^2}{D^2}} \tag{2}$$

where d_c is the diameter of the cone in the plane of the beta edge. This assumes that the diameter of the pipe at the upstream tapping, D_{TAP} , is equal to the diameter of the pipe at the beta edge, D . [Figure 1](#) shows that as the cone diameter increases, β decreases.

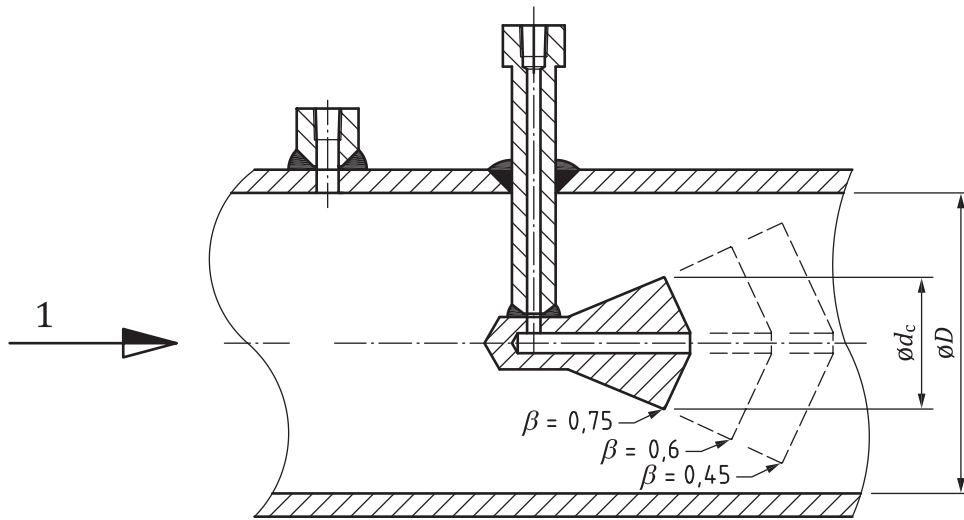

Key
1 flow

Figure 1 — Cone meter showing different values of β

The uncertainty limits can be calculated using the procedure given in ISO 5167-1:2003, Clause 8, except that Formula (3) should be used instead of ISO 5167-1:2003, Formula (3)

$$\frac{\delta q_m}{q_m} = \left[\left(\frac{\delta C}{C} \right)^2 + \left(\frac{\delta \varepsilon}{\varepsilon} \right)^2 + \left(\frac{2(1 + \beta^2 + \beta^4)}{\beta^2(1 + \beta^2)} \right)^2 \left(\frac{\delta D}{D} \right)^2 + \left(\frac{2}{\beta^2(1 + \beta^2)} \right)^2 \left(\frac{\delta d_c}{d_c} \right)^2 + \frac{1}{4} \left(\frac{\delta \Delta p}{\Delta p} \right)^2 + \frac{1}{4} \left(\frac{\delta \rho_1}{\rho_1} \right)^2 \right]^{1/2} \quad (3)$$

Similarly, the value of the volume flow rate can be calculated since

$$q_V = \frac{q_m}{\rho} \quad (4)$$

where ρ is the fluid density at the temperature and pressure for which the volume is stated.

Computation of the flow rate, which is a purely arithmetic process, is performed by replacing the different items on the right-hand side of Formula (1) by their numerical values. Formula (5) in 5.6 (or the computed values in Table A.1) gives cone meter expansibility factors (ε). The values in Table A.1 are not intended for precise interpolation. Extrapolation is not permitted. However, the coefficient of discharge, C , is generally dependent on the Reynolds number, Re , which is itself dependent on q_m , and has to be obtained by iteration (see ISO 5167-1:2003, Annex A for guidance regarding the choice of iteration procedure and initial estimates).

The diameters, d_c and D , mentioned in Formulae (1) and (2) are the values of the diameters at working conditions. Measurements taken at any other conditions should be corrected for any possible expansion or contraction of the primary device and the pipe due to the values of the temperature and pressure of the fluid during the measurement.

As the cone meter flow rate calculation is particularly sensitive to the pipe and cone diameter values used, the user shall ensure that these are correctly entered into the flow computation calculations. For example, care shall be taken to use the measured internal diameter rather than a nominal value.

It is necessary to know the density and the viscosity of the fluid at working conditions. In the case of a compressible fluid, it is also necessary to know the isentropic exponent of the fluid at working conditions.

NOTE The turndown of all differential pressure flow meters is dependent upon the differential pressure range. Typically, a 10:1 turndown in flow rate (equivalent to 100:1 turndown in differential pressure) can be achieved.

5 Cone meters

5.1 Field of application

Uncalibrated cone meters can be used in pipes with diameters between 50 mm and 500 mm and with $0,45 \leq \beta \leq 0,75$. Cone meters with $\beta > 0,75$ shall be calibrated. Cone meters with values of $\beta < 0,45$ are not normally manufactured.

There are limits to the roughness and Reynolds number which shall be addressed.