

SVENSK STANDARD

SS-EN ISO 52921:2016



Fastställt/Approved: 2016-11-08
Publicerad/Published: 2016-11-15
Utgåva/Edition: 1
Språk/Language: engelska/English
ICS: 25.040.20

Standardiserad terminologi för additiv tillverkning – Koordinatsystem och provningsmetodik (ISO/ASTM 52921:2013)

**Standard terminology for additive manufacturing – Coordinate
systems and test methodologies (ISO/ASTM 52921:2013)**



Standarder får världen att fungera

SIS (Swedish Standards Institute) är en fristående ideell förening med medlemmar från både privat och offentlig sektor. Vi är en del av det europeiska och globala nätverk som utarbetar internationella standarder. Standarder är dokumenterad kunskap utvecklad av framstående aktörer inom industri, näringsliv och samhälle och befrämjar handel över gränser, bidrar till att processer och produkter blir säkrare samt effektiviserar din verksamhet.

Delta och påverka

Som medlem i SIS har du möjlighet att påverka framtida standarder inom ditt område på nationell, europeisk och global nivå. Du får samtidigt tillgång till tidig information om utvecklingen inom din bransch.

Ta del av det färdiga arbetet

Vi erbjuder våra kunder allt som rör standarder och deras tillämpning. Hos oss kan du köpa alla publikationer du behöver – allt från enskilda standarder, tekniska rapporter och standardpaket till handböcker och onlinetjänster. Genom vår webbtjänst e-nav får du tillgång till ett lättnavigerat bibliotek där alla standarder som är aktuella för ditt företag finns tillgängliga. Standarder och handböcker är källor till kunskap. Vi säljer dem.

Utveckla din kompetens och lyckas bättre i ditt arbete

Hos SIS kan du gå öppna eller företagsinterna utbildningar kring innehåll och tillämpning av standarder. Genom vår närhet till den internationella utvecklingen och ISO får du rätt kunskap i rätt tid, direkt från källan. Med vår kunskap om standarders möjligheter hjälper vi våra kunder att skapa verklig nytta och lönsamhet i sina verksamheter.

Vill du veta mer om SIS eller hur standarder kan effektivisera din verksamhet är du välkommen in på www.sis.se eller ta kontakt med oss på tel 08-555 523 00.



Standards make the world go round

SIS (Swedish Standards Institute) is an independent non-profit organisation with members from both the private and public sectors. We are part of the European and global network that draws up international standards. Standards consist of documented knowledge developed by prominent actors within the industry, business world and society. They promote cross-border trade, they help to make processes and products safer and they streamline your organisation.

Take part and have influence

As a member of SIS you will have the possibility to participate in standardization activities on national, European and global level. The membership in SIS will give you the opportunity to influence future standards and gain access to early stage information about developments within your field.

Get to know the finished work

We offer our customers everything in connection with standards and their application. You can purchase all the publications you need from us - everything from individual standards, technical reports and standard packages through to manuals and online services. Our web service e-nav gives you access to an easy-to-navigate library where all standards that are relevant to your company are available. Standards and manuals are sources of knowledge. We sell them.

Increase understanding and improve perception

With SIS you can undergo either shared or in-house training in the content and application of standards. Thanks to our proximity to international development and ISO you receive the right knowledge at the right time, direct from the source. With our knowledge about the potential of standards, we assist our customers in creating tangible benefit and profitability in their organisations.

If you want to know more about SIS, or how standards can streamline your organisation, please visit www.sis.se or contact us on phone +46 (0)8-555 523 00



Europastandarden EN ISO/ASTM 52921:2016 gäller som svensk standard. Detta dokument innehåller den officiella engelska versionen av EN ISO/ASTM 52921:2016.

The European Standard EN ISO/ASTM 52921:2016 has the status of a Swedish Standard. This document contains the official English version of EN ISO/ASTM 52921:2016.

© Copyright/Upphovsrätten till denna produkt tillhör SIS, Swedish Standards Institute, Stockholm, Sverige. Användningen av denna produkt regleras av slutanvändarlicensen som återfinns i denna produkt, se standardens sista sidor.

© Copyright SIS, Swedish Standards Institute, Stockholm, Sweden. All rights reserved. The use of this product is governed by the end-user licence for this product. You will find the licence in the end of this document.

Upplysningar om sakinnehållet i standarden lämnas av SIS, Swedish Standards Institute, telefon 08-555 520 00. Standarder kan beställas hos SIS Förlag AB som även lämnar allmänna upplysningar om svensk och utländsk standard.

Information about the content of the standard is available from the Swedish Standards Institute (SIS), telephone +46 8 555 520 00. Standards may be ordered from SIS Förlag AB, who can also provide general information about Swedish and foreign standards.

Denna standard är framtagen av kommittén för Additiv tillverkning, SIS/TK 563.

Har du synpunkter på innehållet i den här standarden, vill du delta i ett kommande revideringsarbete eller vara med och ta fram andra standarder inom området? Gå in på www.sis.se - där hittar du mer information.

EUROPEAN STANDARD

EN ISO/ASTM 52921

NORME EUROPÉENNE

EUROPÄISCHE NORM

September 2016

ICS 25.040.20

English Version

Standard terminology for additive manufacturing -
Coordinate systems and test methodologies (ISO/ASTM
52921:2013)

Terminologie normalisée pour la fabrication additive -
Systèmes de coordonnées et méthodes d'essai
(ISO/ASTM 52921:2013)

Normbegrifflichkeiten für die Additive Fertigung -
Koordinatensysteme und Prüfmethodologien
(ISO/ASTM 52921:2013)

This European Standard was approved by CEN on 29 August 2016.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

	Page
1 Scope	1
2 Referenced Documents	1
3 Significance and Use	1
4 Terminology	1
5 Keywords.....	3
Annex	4
Figure A1.1 Generic (Upward Building) Additive Manufacturing Machine/System.....	4
Figure A1.2 Generic (Downward Building) Additive Manufacturing Machine/System.....	4
Figure A1.3 Right Hand Rule for Positive Rotations with Reference to the Build Volume Origin.....	5
Figure A1.4 Example of an Arbitrarily Oriented Minimum Bounding Box.....	5
Figure A1.5 Examples of Different Types of Bounding Boxes.....	6
Figure A1.6 Initial Build Orientation	7
Figure A1.7 Why is a Picture Normally Required to Communicate the Initial Build Orientation?.....	8
Figure A1.8 Orthogonal Orientation Notation.....	9
Figure A1.9 Examples of Bilateral Symmetry	10
Figure A1.10 Examples where Symmetry Allows Abbreviation of Orthogonal Orientation Notation.....	11
Figure A1.11 Part Location and Initial Build Orientation: Five Round Bar Specimens with <i>Z</i> Orientation.....	11
Figure A1.12 Part Location and Reorientation: Round Bars Oriented at <i>B</i> +45 from <i>Z</i> and <i>B</i> -45 from <i>Z</i>	12
Table A1.1 Description of Part Locations and Orientations	12
Table A1.2 Description of Part Locations and Orientations	12
Table X1.1 Task Group Contributors	13

The text of ISO/ASTM 52921:2013 has been prepared by Technical Committee ISO/TC 261 “Additive manufacturing” of the International Organization for Standardization (ISO) and has been taken over as EN ISO/ASTM 52921:2016 by Technical Committee CEN/TC 438 “Additive Manufacturing” the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2017, and conflicting national standards shall be withdrawn at the latest by March 2017.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO/ASTM 52921:2013 has been approved by CEN as EN ISO/ASTM 52921:2016 without any modification.



Standard Terminology for Additive Manufacturing—Coordinate Systems and Test Methodologies¹

This standard is issued under the fixed designation ISO/ASTM 52921; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision.

1. Scope

1.1 This terminology includes terms, definitions of terms, descriptions of terms, nomenclature, and acronyms associated with coordinate systems and testing methodologies for additive manufacturing (AM) technologies in an effort to standardize terminology used by AM users, producers, researchers, educators, press/media, and others, particularly when reporting results from testing of parts made on AM systems. Terms included cover definitions for machines/systems and their coordinate systems plus the location and orientation of parts. It is intended, where possible, to be compliant with ISO 841 and to clarify the specific adaptation of those principles to additive manufacturing.

NOTE 1—The applicability of this standard to cladding has to be evaluated. Discussions are under progress.

NOTE 2—Non-cartesian systems are not covered by this standard.

1.2 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:²

D638 Test Method for Tensile Properties of Plastics

E8/E8M Test Methods for Tension Testing of Metallic Materials

¹ This terminology is under the jurisdiction of ASTM Committee F42 on Additive Manufacturing Technologies and is the direct responsibility of Subcommittee F42.01 on Test Methods, and is also under the jurisdiction of ISO/TC 261.

Current edition approved March 26, 2013. Published May 2013. Originally published as ASTM F2921-11. Last previous edition ASTM F2921-11^{e3}.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

F2792 Terminology for Additive Manufacturing Technologies³

2.2 *ISO Standard*:³

ISO 841 Industrial Automation Systems and Integration—Numerical Control of Machines—Coordinate System and Motion Nomenclature

ISO 527 (all parts), Plastics — Determination of tensile properties

ISO 6892-1 Metallic materials — Tensile testing – Part 1: Method of test at room temperature

3. Significance and Use

3.1 Although many additive manufacturing systems are based heavily upon the principles of Computer Numerical Control (CNC), the coordinate systems and nomenclature specific to CNC are not sufficient to be applicable across the full spectrum of additive manufacturing equipment. This terminology expands upon the principles of ISO 841 and applies them specifically to additive manufacturing. Although this terminology is intended to complement ISO 841, if there should arise any conflict, this terminology shall have priority for additive manufacturing applications. For any issues not covered in this terminology, the principles in ISO 841 may be applied.

3.2 Furthermore, this terminology does not prescribe the use of any specific existing testing methodologies or standards that practitioners of AM may wish to employ for testing purposes; however, it is expected that practitioners will employ appropriate existing methodologies and standards to test parts made by AM.

4. Terminology

4.1 *Definitions*—Definitions shall be in accordance with Terminology **F2792** and the following:

³ Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036, <http://www.ansi.org>.

Terms and Definitions—AM Machines and their Coordinate Systems

build platform, *n*—of a machine, any base which provides a surface upon which the build is started and supported throughout the build process (see A1.1).

DISCUSSION—The machine build platform may be solid or perforated and made from a wide variety of materials and constructions.

DISCUSSION—In some systems the parts are built attached to the build platform, either directly or through a support structure. In other systems, such as powder bed systems, no direct mechanical fixture between the build and the platform may be required.

build surface, *n*—area where material is added, normally on the last deposited layer which becomes the foundation upon which the next layer is formed.

DISCUSSION—For the first layer the build surface is often the build platform.

DISCUSSION—If the orientation of the material deposition or consolidation means, or both, is variable, it may be defined relative to the build surface (for example, a blown powder head may be kept normal to it. See also Z axis discussion).

front, *n*—of a machine, shall be designated by the machine builder.

DISCUSSION—Generally, this is the side of the machine that the operator faces to access the user interface or primary viewing window, or both. (See A1.1).

machine coordinate system, *n*—a three-dimensional Cartesian coordinate system as defined by a fixed point on the build platform “with the three principal axes labeled X, Y, and Z, with rotary axes about each of these axes labeled A, B, and C, respectively” (see A1.1, A1.2, and A1.3) as stated in ISO 841.

origin, *n*—a designated reference point at which the three primary axes in a Cartesian coordinate system intersect. Synonyms: zero point, or (0, 0, 0) when using X, Y, and Z coordinates.

build volume origin, *n*—shall be located at the center of the build platform fixed on the build facing surface.

DISCUSSION—This is a universal origin reserved for the purpose of identifying the location of parts within the build volume. (See A1.1 and A1.2).

machine origin, *n*—origin as defined by the original equipment manufacturer. Synonyms: machine home, machine zero point.

Z axis, *n*—of a machine, for processes employing planar layerwise addition of material, shall run normal to the layers. (See A1.1 and A1.2.)

DISCUSSION—For processes employing planar layerwise addition of material, the positive Z shall be the direction from the first layer to the subsequent layers (see A1.1 and A1.2).

DISCUSSION—Where addition of material is possible from multiple directions (such as with blown powder systems), the Z axis may be identified according to the principles in ISO 841 (section 4.3.3) which addresses “swiveling or gimballing.”

X axis, *n*—of a machine, shall run perpendicular to the Z axis and parallel to the front of the machine. (See A1.1 and A1.2.)

DISCUSSION—Where possible, the X axis shall be horizontal and parallel with one of the edges of the build platform.

DISCUSSION—The positive X direction shall be from left to right as viewed from the front of the machine while facing toward the build volume origin.

Y axis, *n*—of a machine, shall run perpendicular to the Z and X axes with positive direction defined to make a right hand set of coordinates as specified in ISO 841.

DISCUSSION—Where possible, the Y axis shall be horizontal and parallel with one of the edges of the build platform.

DISCUSSION—In the most common case of an upwards Z positive direction, the positive Y direction shall be from the front to the back of the machine as viewed from the front of the machine (see A1.1).

DISCUSSION—In the case of building in the downwards Z positive direction the positive Y direction shall be from the back of the machine to the front as viewed from the front of the machine (see A1.2).

Terms and Definitions—Location and Orientation of Parts Within the Build Volume

arbitrarily oriented minimum bounding box, *n*—of a part, the minimum perimeter cuboid that can span the maximum extents of the points on the surface of a 3D part calculated without any constraints on the resulting orientation of the box (see A1.4 and A1.5).

DISCUSSION—Where the manufactured part includes the test geometry plus additional external features (for example, labels, tabs or raised lettering), the bounding box may be specified according to the test part geometry excluding the additional external features if noted.

geometric center, *n*—of a bounding box, location at the arithmetic middle of the bounding box of the part. Synonym: centroid.

DISCUSSION—The center of the bounding box may lie outside the part.

initial build orientation, *n*—of a part, is the orientation of the part as first placed in the build volume and becomes the reference for any further part reorientation (see A1.6).

DISCUSSION—The initial build orientation is most easily communicated via 3D computer models (which can be interrogated for part position and orientation relative to the build volume origin). Where practical, the initial build orientation may be designated as the part orientation in the 3D computer model. Without electronic transfer of computer models, it should be documented with image(s) of the part(s) within the build volume and their orientation relative to the build volume origin (see A1.6 and A1.7).

orthogonal orientation notation, *n*—of a part's initial build orientation, may be used when the intended build orientation for a part is such that its arbitrarily oriented minimum

bounding box is aligned parallel to the X, Y, and Z axes of the build volume origin (as shown in A1.5(c)), its orientation may be described by listing which axis is parallel to the longest overall dimension of the bounding box first, followed by the axis which is parallel to the second longest overall dimension of the bounding box second, followed by the axis which is parallel to the third longest overall dimension of the bounding box.

DISCUSSION— For example, a specimen which is placed so that its longest dimension is parallel to the Z axis, the second longest dimension is parallel to the X axis, and its shortest overall dimension is parallel to the Y axis shall be defined as having a ZXY orientation (see A1.8 and A1.10 for examples).

DISCUSSION—Where symmetry allows unambiguous designation of orientation by listing fewer than three axes (in descending order of length), orthogonal orientation notation can be further abbreviated (see A1.9 and A1.10).

DISCUSSION—Some combinations of part symmetry in an orthogonal initial build orientation fully define only one possible orientation and therefore no image is required to communicate the initial build orientation. This is the case for parts like the dog bone specimen (D638 or ISO 527) in A1.10, which are bilaterally symmetrical (see A1.9) through its geometric center in the XY, XZ, YZ planes and have no rotational symmetry. This is also the case for parts like the round tension bar (see A1.10) which have 360° rotational symmetry through a center axis and are also bilaterally symmetrical across the plane

bisecting the part perpendicular to the axis of rotational symmetry. Normally, an image is required to identify initial build orientation when parts have features with less than 360° rotational symmetry (see A1.7).

part location, *n*—within the build volume should be specified by the X, Y, and Z coordinates for the position of the geometric center of each part's arbitrarily oriented minimum bounding box with respect to the build volume origin (see A1.11 and A1.12).

DISCUSSION—Where finding the arbitrarily oriented minimum bounding box is not possible or practical, the coordinates of the center of the part's bounding box (aligned orthogonally to the build volume origin) when the part is in its initial build orientation may be used for defining part location.

part reorientation, *n*—the reorientation of parts within the build volume shall be specified by rotation around the geometric center of the part's arbitrarily oriented minimum bounding box in the sequence of A, B, and C (see A1.3 and A1.12) from a specified initial build orientation of that part.

DISCUSSION—Only non-zero angles need to be listed. For example, see A1.12 where the front row of parts are reoriented to A= 0, B= +45, C= 0 from an initial build orientation Z and are identified as B+45 from Z.

5. Keywords

5.1 additive manufacturing; test methods; machine coordinate system; part location; part orientation

ANNEX

(Mandatory Information)

A1. IMAGES REFERRED TO IN THE DEFINITIONS

A1.1 See Fig. A1.1.

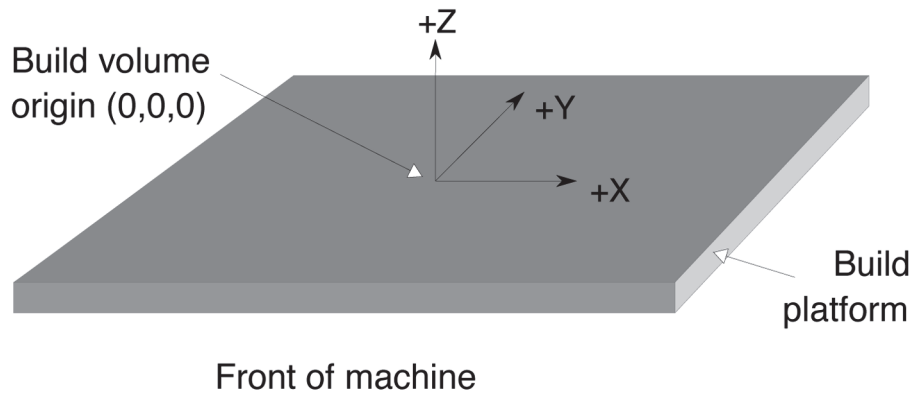


FIG. A1.1 Generic (Upward Building) Additive Manufacturing Machine/System

A1.2 See Fig. A1.2.

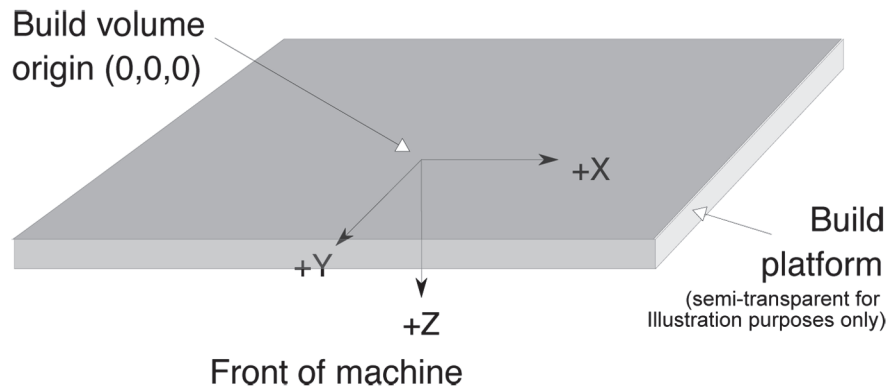


FIG. A1.2 Generic (Downward Building) Additive Manufacturing Machine/System