

SVENSK STANDARD

SS-ISO 3560:2013

Fastställt/Approved: 2013-06-29
Publicerad/Published: 2013-07-03
Utgåva/Edition: 3
Språk/Language: engelska/English
ICS: 43.020

Vägfordon – Frontalkollisionsprovning mot barriär eller stolpe (ISO 3560:2013, IDT)

Road vehicles – Frontal fixed barrier or pole impact test procedure (ISO 3560:2013, IDT)

This preview is downloaded from www.sis.se. Buy the entire standard via <https://www.sis.se/std-98572>

Standarder får världen att fungera

SIS (Swedish Standards Institute) är en fristående ideell förening med medlemmar från både privat och offentlig sektor. Vi är en del av det europeiska och globala nätverk som utarbetar internationella standarder. Standarder är dokumenterad kunskap utvecklad av framstående aktörer inom industri, näringsliv och samhälle och befrämjar handel över gränser, bidrar till att processer och produkter blir säkrare samt effektiviserar din verksamhet.

Delta och påverka

Som medlem i SIS har du möjlighet att påverka framtida standarder inom ditt område på nationell, europeisk och global nivå. Du får samtidigt tillgång till tidig information om utvecklingen inom din bransch.

Ta del av det färdiga arbetet

Vi erbjuder våra kunder allt som rör standarder och deras tillämpning. Hos oss kan du köpa alla publikationer du behöver – allt från enskilda standarder, tekniska rapporter och standardpaket till handböcker och onlinetjänster. Genom vår webbtjänst e-nav får du tillgång till ett lättnavigerat bibliotek där alla standarder som är aktuella för ditt företag finns tillgängliga. Standarder och handböcker är källor till kunskap. Vi säljer dem.

Utveckla din kompetens och lyckas bättre i ditt arbete

Hos SIS kan du gå öppna eller företagsinterna utbildningar kring innehåll och tillämpning av standarder. Genom vår närhet till den internationella utvecklingen och ISO får du rätt kunskap i rätt tid, direkt från källan. Med vår kunskap om standarders möjligheter hjälper vi våra kunder att skapa verklig nytta och lönsamhet i sina verksamheter.

Vill du veta mer om SIS eller hur standarder kan effektivisera din verksamhet är du välkommen in på www.sis.se eller ta kontakt med oss på tel 08-555 523 00.



Standards make the world go round

SIS (Swedish Standards Institute) is an independent non-profit organisation with members from both the private and public sectors. We are part of the European and global network that draws up international standards. Standards consist of documented knowledge developed by prominent actors within the industry, business world and society. They promote cross-border trade, they help to make processes and products safer and they streamline your organisation.

Take part and have influence

As a member of SIS you will have the possibility to participate in standardization activities on national, European and global level. The membership in SIS will give you the opportunity to influence future standards and gain access to early stage information about developments within your field.

Get to know the finished work

We offer our customers everything in connection with standards and their application. You can purchase all the publications you need from us - everything from individual standards, technical reports and standard packages through to manuals and online services. Our web service e-nav gives you access to an easy-to-navigate library where all standards that are relevant to your company are available. Standards and manuals are sources of knowledge. We sell them.

Increase understanding and improve perception

With SIS you can undergo either shared or in-house training in the content and application of standards. Thanks to our proximity to international development and ISO you receive the right knowledge at the right time, direct from the source. With our knowledge about the potential of standards, we assist our customers in creating tangible benefit and profitability in their organisations.

If you want to know more about SIS, or how standards can streamline your organisation, please visit www.sis.se or contact us on phone +46 (0)8-555 523 00



Den internationella standarden ISO 3560:2013 gäller som svensk standard. Detta dokument innehåller den officiella engelska versionen av ISO 3560:2013.

Denna standard ersätter SS-ISO 3560, utgåva 2.

The International Standard ISO 3560:2013 has the status of a Swedish Standard. This document contains the official version of ISO 3560:2013.

This standard supersedes the Swedish Standard SS-ISO 3560, edition 2.

© Copyright/Upphovsrätten till denna produkt tillhör SIS, Swedish Standards Institute, Stockholm, Sverige. Användningen av denna produkt regleras av slutanvändarlicensen som återfinns i denna produkt, se standardens sista sidor.

© Copyright SIS, Swedish Standards Institute, Stockholm, Sweden. All rights reserved. The use of this product is governed by the end-user licence for this product. You will find the licence in the end of this document.

Upplysningar om sakinnehållet i standarden lämnas av SIS, Swedish Standards Institute, telefon 08-555 520 00. Standarder kan beställas hos SIS Förlag AB som även lämnar allmänna upplysningar om svensk och utländsk standard.

Information about the content of the standard is available from the Swedish Standards Institute (SIS), telephone +46 8 555 520 00. Standards may be ordered from SIS Förlag AB, who can also provide general information about Swedish and foreign standards.

Denna standard är framtagen av kommittén för Fordonssäkerhet, SIS/TK 237.

Har du synpunkter på innehållet i den här standarden, vill du delta i ett kommande revideringsarbete eller vara med och ta fram andra standarder inom området? Gå in på www.sis.se - där hittar du mer information.

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Impact test set-up	4
4.1 Test site.....	4
4.2 Barrier.....	4
4.3 Pole.....	6
4.4 Test conditions.....	6
5 Test vehicle	7
5.1 General state and equipment.....	7
5.2 Mass of the test vehicle.....	7
5.3 Passenger compartment adjustments.....	8
6 Test dummy	9
6.1 Type.....	9
6.2 Clothing and shoes.....	10
6.3 Temperature.....	10
7 Test dummy installation	10
7.1 General.....	10
7.2 Head.....	10
7.3 Torso.....	10
7.4 H-point of test dummy.....	11
7.5 Pelvic angle.....	11
7.6 Thighs and legs.....	11
7.7 Arms.....	11
7.8 Hands.....	12
7.9 Feet.....	12
8 Impact response measurements	12
9 Instrumentation	13
Bibliography	14

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3560 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 10, *Impact test procedures*.

This third edition cancels and replaces the second edition (3560:2001), which has been technically revised.

Road vehicles — Frontal fixed barrier or pole impact test procedure

1 Scope

This International Standard specifies a general frontal test procedure for impact on fixed barrier or pole. There are several applicable test configurations, some with specific test procedures. This International Standard describes general testing requirements for conducting accurate and uniform frontal testing.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 612, *Road vehicles — Dimensions of motor vehicles and towed vehicles — Terms and definitions*

ISO 1176:1990, *Road vehicles — Masses — Vocabulary and codes*

ISO 3784, *Road vehicles — Measurement of impact velocity in collision tests*

ISO 6487, *Road vehicles — Measurement techniques in impact tests — Instrumentation*

ISO 6549¹⁾, *Road vehicles — Procedure for H- and R-point determination*

FMVSS 208:1997, *Actions to Reduce the Adverse Effects of Air Bags*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 612 and the following apply.

3.1

impact angle

angle between the longitudinal median plane (of the vehicle) and a vertical plane perpendicular to the contact plane of the barrier face

Note 1 to entry: The longitudinal median plane (of the vehicle) is also called the longitudinal plane of symmetry or zero Y plane (see ISO 4130).

3.2

vehicle width

W

distance between two planes parallel to the longitudinal median plane (of the vehicle) and touching the vehicle on either side of the longitudinal median plane


Note 1 to entry: All parts of the vehicle, including any lateral projections of fixed parts (wheels, hubs, door-handles, bumpers, etc.) are contained between these two planes, except for the rear-view mirrors, side marker lamps, tyre pressure indicators, direction indicator lamps, position lights, customs seals, flexible mud-guards, door-edge guards, hinged side windows in the open position, fuel filler flaps in the open position, retractable steps, snow chains and the deflected part of the tyre walls immediately above the point of contact with the ground.

1) Withdrawn.

**3.3
overlap**

percentage of the vehicle width covered by the barrier face (see [Figure 1](#))

Note 1 to entry: The overlap may be left or right. [Figure 1](#) shows a left side overlap.

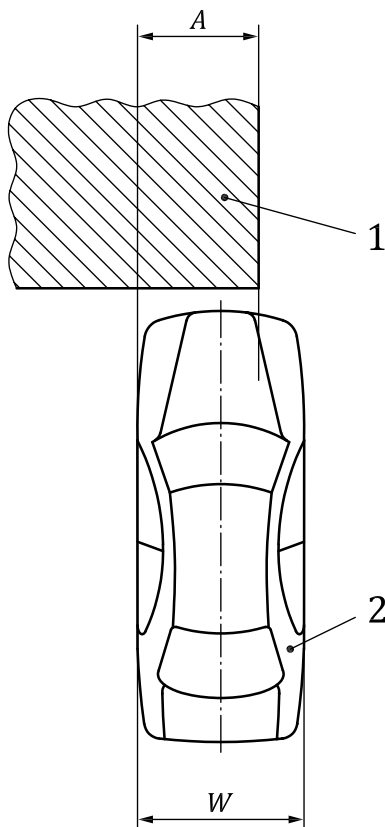

Key

- 1 Barrier
- 2 Vehicle

$$\text{Overlap} = \frac{A}{W} \times 100$$

Figure 1 — Overlap

**3.4
offset**

B
perpendicular distance between the longitudinal median plane (of the vehicle) and the centreline of the pole

Note 1 to entry: The offset may be left or right. [Figure 2](#) shows a left side offset.

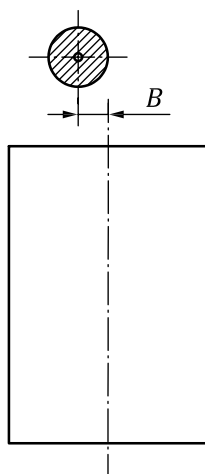


Figure 2 — Offset

3.5

full frontal, 0° angle impact, 100 % overlap

type of impact in which the barrier face is wider than the impacting vehicle and the direction of travel of the vehicle is perpendicular to the barrier face

3.6

frontal, angled impact

type of impact in which the barrier face is wider than the projected width of the impacting vehicle (see [Figure 3](#)) and the angle of impact is other than zero

Note 1 to entry: The barrier face can be angled so that the initial contact is to the right or left of the longitudinal median plane (of the vehicle).

3.7

offset frontal impact

type of impact in which the vehicle impacts a barrier face with an overlap of less than 100 %


Note 1 to entry: Any angle of impact can be used.

3.8

pole impact

type of impact in which the vehicle impacts a circular pole considerably narrower than the width of the vehicle

Note 1 to entry: The pole can be offset to either side of the longitudinal median plane (of the vehicle).

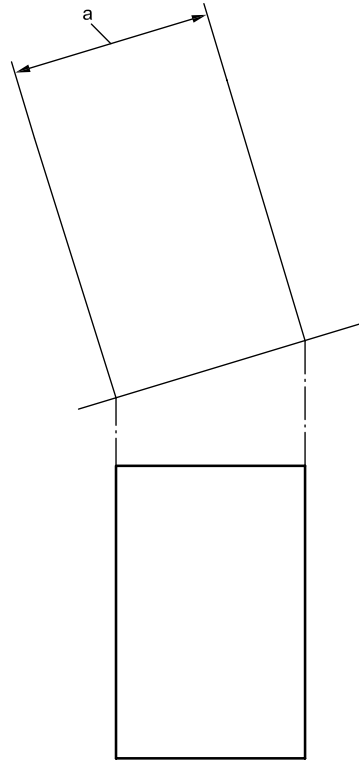

a Projected width of vehicle.

Figure 3 — Frontal, angled impact

4 Impact test set-up

4.1 Test site

The test area shall be large enough to accommodate the run-up track, barrier and technical installations necessary for the test.

The crash site surface shall be level and rigid for a length of at least 10 m in front of the impact object, at least along the tyre path, and ideally throughout the entire test pad – to account for a potential impact of the vehicle underside structure with the ground. There shall be no more than a 1 % slope measured over any 1 m length for at least the last 10 m.

4.2 Barrier

4.2.1 Fixed barrier

The barrier shall consist of a block made of a relevant material able to resist to impact. No cracks, breakage or plastic deformation should occur to the fixed barrier. The width shall be at least 3 m and the height at least 1,5 m.

The barrier face is secured to a mass not less than 70 000 kg. Its movement at impact shall be restricted to ± 2 mm. The barrier specifications given in [4.2.2](#) may be varied as necessary provided the barrier face is large enough to accommodate the frontal crash area of the test vehicle.

4.2.2 Barrier face

4.2.2.1 General

A variety of barrier faces may be used. Some are specified below.

4.2.2.2 Rigid flat barrier face

The barrier face shall be flat and vertical and shall be covered with fir plywood 18 mm to 26 mm thick.

4.2.2.3 Anti-slide device (ASD) on rigid flat barrier face


The ASD, which shall be 40 mm thick, 40 mm wide and at least 1 500 mm long, fabricated from steel and positioned to permit $20 \text{ mm} \pm 2 \text{ mm}$ projection in front of the plywood, shall be mounted vertically at a distance of 350 mm left and right of the theoretical (projected) point of impact of the longitudinal median plane (of the vehicle).

4.2.2.4 Deformable barrier face

The deformable barrier face shall be vertical and either flat or with a bumper simulation. It shall have sufficient height, depth and width to allow the desired test to be carried out.

4.2.2.5 Rigid offset barrier face

The offset barrier face shall have a sufficient width to allow the desired overlap, a height of at least 1 500 mm and a depth of at least 1 000 mm. The edge radius on both sides shall be $190 \text{ mm} \pm 2 \text{ mm}$. The face may be set at an angle to the barrier and may include an ASD (see [Figure 4](#)).

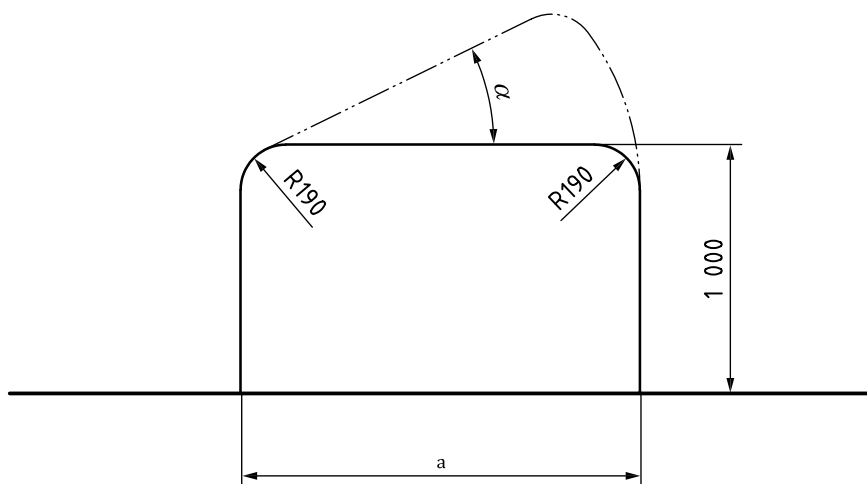

a As desired.

Figure 4 — Rigid offset barrier face

In the case of an offset deformable barrier face, the edges of this face shall be in line with the sides of the main offset barrier and fully supported.

4.2.3 Ground clearance

The ground clearance shall be set according to the test type, and within a tolerance of $\pm 5 \text{ mm}$.